



4300M DIGITAL WEIGHT INDICATOR

**4300M
 DIGITAL WEIGHT INDICATOR**

**\$ 625.00
 (A)**



Model 4300
 CC # 97-038A1
 Class III
 n_{max}=10,000

Measurement Canada
 NOA: AM-5201



- * **CAPACITY:** 5 to 100,000 lb menu selectable; all capacities built in on one memory chip
- * **RESOLUTION:** 3000 divisions in Standard resolution mode
 5000 divisions in Precision resolution mode
 10000 divisions in Super Precision resolution mode
- * **CALIBRATION:** Only 10% of full scale required for calibration; single point auto-calibration assures easy field calibration & setup
- * **FUNCTIONS:** Zero, Units, Print, Over, and Under pushbuttons standard
- * **MOUNTING:** U-Bracket for wall, table or under shelf mount.
- * **POWER:** 115 VAC, 50/60 HZ; 230 VAC Optional
- * **USER SET UP:** User friendly setup menu
- * **LOAD CELLS:** Drives up to Four (4) 350 ohm load cells
- * **OPTIONS:** Remote switch
- * **INPUT/OUTPUT:** Bi-directional RS-232 standard; RS-485 optional, 6 built-in print formats, including Eltron Printer
- * **APPROVALS:** NTEP, Class III, 10000 divisions
 USDA Approved

Shipping Weight 12 lbs.

Carton Size 13" x 13" x 10"



7000 DIGITAL WEIGHT INDICATOR

7000M DIGITAL WEIGHT INDICATOR

**\$ 575.00
 (A)**



Model 7000M
 CC# 99-129
 Class III
 n_{max} =10,000

Measurement Canada
 NOA: AM-5347 (10000d)



- * **CAPACITY:** 5 to 100,000 lb menu selectable;
all capacities built in on one memory chip
- * **RESOLUTION:** 3000 divisions in Standard mode
5000 divisions in Precision mode
10000 divisions in Super Precision mode
- * **CALIBRATION:** Only 10% of full scale required for
calibration; single point auto-calibration
assures easy field calibration & setup
- * **FUNCTIONS:** ZERO pushbutton standard
- * **MOUNTING:** U-Bracket for wall, table or under shelf
mount
- * **POWER:** 115 VAC, 50/60 HZ; 230 VAC Optional
- * **USER SET UP:** User friendly setup menu
- * **LOAD CELLS:** Drives up to Four (4) 350 ohm load cells
- * **OPTIONS:** 4-20mA Output, RS-232 Data Cables; plus
many more options. See 7000 series
scales price list.
- * **APPROVALS:** NTEP, Class III, 10000 divisions
USDA Approved

Shipping Weight 12 lbs.

Carton Size 13" x 13" x 10"



7000XL DIGITAL WEIGHT INDICATOR

7000XLM DIGITAL WEIGHT INDICATOR

**\$ 575.00
 (A)**



Model 7000XLM
 CC# 99-129
 Class III
 n_{max} =10,000

Measurement Canada
 NOA: AM-5347 (10000d)



- * **CAPACITY:** 5 to 100,000 lb menu selectable;
all capacities built in on one memory chip
- * **RESOLUTION:** 3000 divisions in Standard mode
5000 divisions in Precision mode
10000 divisions in Super Precision mode
- * **CALIBRATION:** Only 10% of full scale required for
calibration; single point auto-calibration
assures easy field calibration & setup
- * **FUNCTIONS:** Zero, Units & Print pushbuttons standard
- * **MOUNTING:** U-Bracket for wall, table or under shelf
mount
- * **POWER:** 115 VAC, 50/60 HZ; 230 VAC Optional
- * **USER SET UP:** User friendly setup menu
- * **LOAD CELLS:** Drives up to Four (4) 350 ohm load cells
- * **OPTIONS:** 4-20mA Output, RS-232 Data Cables;
plus many more options. See 7000XL
series scales price list.
- * **APPROVALS:** NTEP, Class III, 10000 divisions
USDA Approved

Shipping Weight 12 lbs.

Carton Size 13" x 13" x 10"

www.doranscales.com



8000XLM SERIES BATTERY POWERED INDICATOR

8000XLM

**\$ 765.00
 (A)**



Model 8000XLM
 CC# 99-129
 Class III
 n_{max} =10,000

Measurement Canada
 NOA: AM-5347 (10000d)



NOTES:

1) Refer to 8000XL Series Scale Price Sheet for capacities and resolutions.

- **CAPACITY:** 1 to 100,000 lb menu selectable;
all capacities built in on one memory chip
- **RESOLUTION:** 3000 divisions in Standard resolution mode
5000 divisions in Precision resolution mode
10000 divisions in Super Precision resolution mode
- **CALIBRATION:** Calibrate with as little as 10% full scale capacity.
- **FUNCTIONS:** Zero, Units & Print pushbuttons standard.
- **MOUNTING:** U-Bracket for wall, table or under shelf mount.
- **POWER:** Internal Rechargeable Battery/115 VAC, 50/60 HZ;
(230 VAC Optional)
- **USER SET UP:** User friendly setup menu
- **LOAD CELLS:** Drives up to Four (4) 350 ohm load cells
- **OPTIONS:** 4-20mA Output, RS-232 Data Cables; plus many more options. See 8000XL series scales price list.
- **APPROVALS:** NTEP, Class III, 10000 divisions

Shipping Weight 15 lbs.

Carton Size 13" x 13" x 10"



9000XLM DIGITAL WEIGHT INDICATOR

9000XLM

\$ 895.00
(A)



Model 9000XLM
CC # 01-095
Class III
 $n_{max} = 10,000$

Shipping Weight 14 lbs.

Carton Size 16" x 16" x 16"

- * **Capacity & Resolution:** User definable capacity & resolution up to 50,000d - 10,000d if used in legal for trade mode.
- * **Controls:** ZERO, UNITS, PRINT, GROSS/NET, TARE, CLEAR, MENU and Numeric Keypad 0-9, Keypad Calibration, Independent Zero & Span Calibration, Accumulator Function, Time-Date and Audit Trail
- * **Batch Programs:**
 - 1) Two Speed Net Weigh Fill with Manual Feed
 - 2) Two Speed Hopper Fill with Manual Dump and Fill
 - 3) Three Speed Fill with Automatic Dump and Auto Repeat
 - 4) Three Speed Loss in Weight with Manual Dump
- * **Displays:** Weight Display: 6 digit red LED, 1" high
 Auxiliary Display: 2 line alphanumeric LCD
- * **Communications:** Bi-directional RS-232 standard
 Fiber Optic Interface (optional)
 4-20mA Output (optional)
- * **Power:** 115/230 VAC 50/60 Hz
- * **Construction:** 304 Stainless Steel (16 Gauge, NEMA 4X, IP65)
- * **Units:** lb, kg, g, oz, lb & oz and user definable units
- * **Input/Output:** 4 Internal Inputs
 4 Internal Outputs
- * **Dimensions:** 6" h x 10" w x 3" d
- * **Load Cells:** Drives up to Four (4) 350 ohm load cells
- * **Relays:** Internal 4 Slot - Solid State Relay Board (optional)

Pricing for options is shown on the following page.



9000XLM OPTIONS

9XOPT60: Internal 4 Slot Relay Board \$ 145.00

Includes: Printed circuit board with sockets to accept the relays listed below and an attached six foot long cable with color coded leads. Relays can be configured as normally open or normally closed.

Note: One or more of the following relays must be ordered with this option.

9XOPT61: Mechanical Relay \$ 20.00
 10 Amp - 250VAC/30VDC

9XOPT62: Solid State Relay - AC \$ 35.00
 2 Amp - 100-240VAC


9XOPT63: Solid State Relay - DC \$ 35.00
 2 Amp - 5 - 48VDC

9XOPTC0: ___ ___ RS 232 Cable with Pigtails \$ 65.00

9XOPTC1: ___ ___ RS 232 Cable with 9 Pin "D" Female Connector \$ 75.00

9XOPTC2: ___ ___ RS 232 Cable with 25 Pin "D" Female Connector \$ 85.00

Table for Option C

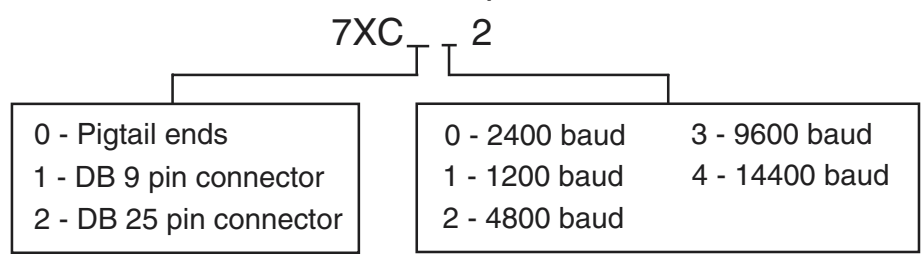

9XOPT57: 4-20mA Output \$ 195.00

Includes: Internal 4-20mA output.

9XOPT49: Fiber Optic Interface \$ 275.00

Includes: Fiber Optic Interface board mounted inside of the 9000XLM, a special backplate to accomodate the fiber optic cables, and 50 feet of fiber optic cables.

9XOPT51: Fiber Optics Converter for RS-232 Output \$ 115.00

Includes: One single function fiber optic converter and a wall mounted transformer.