


FlashCore-B™ (FB)

RECOMMENDED APPLICATION:
Ultra-low power, mass data storage

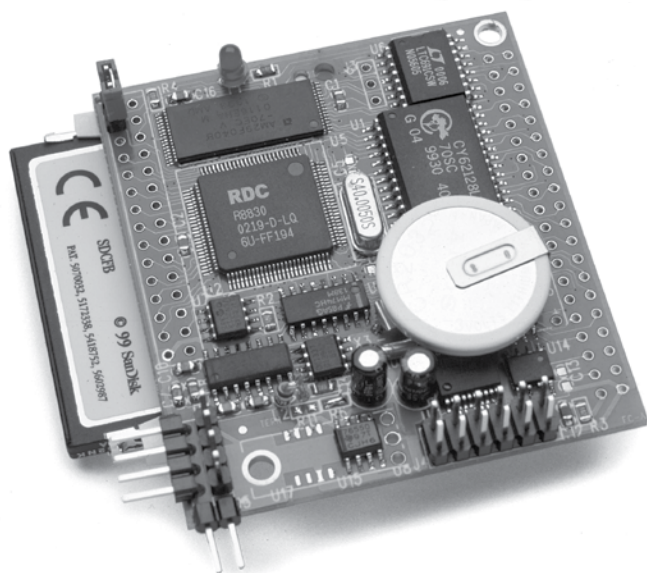

Above is the component-side of the FlashCore-B with complete embedded controller.

Features:

- 2.1 x 2.35 x 0.7 inches
- Easy to program in C/C++, 40 MHz 188 CPU
- Power-off mode: 35 μ A low-drop voltage
- Power-save mode: 20 mA with 20 MHz
- 512KB ACTF Flash and 128/512KB battery backed SRAM
- 2 PWM outputs, 3 timers and Pulse Width Demodulation
- 20+ I/O lines, 2 RS232, 512 bytes EE, External interrupts
- 8 channels of 16-bit ADC (ADS8344, 20KHz, 0-5V)
- 4 channels of 12-bit DAC (DAC7612, 0-4V)
- Supervisor chip (691), power failure, reset and watchdog
- Ultra-low quiescent current, low-drop voltage regulator

Summary

The FlashCore-B (**FB**)™ is a low power embedded controller based on a high performance 40 MHz 188 CPU with 2 UARTs, timers, I/Os, 512KB Flash, 128K/512KB SRAM, EE, a real time clock (DS1337, Maxim), 16-bit ADC, DAC and a 50-pin CompactFlash receptacle. It is a variant of the original FlashCore (FC) with better mechanical mounting for the CompactFlash adapter, and more precise analog inputs. The **FB** is ideal for precision data acquisition, industrial process control, and battery-powered solutions for applications requiring mass data exchange.

Special Features


The 16-bit ADC (ADS8344, TI) provides 8 single-ended or 4 differential analog inputs (0-5V) with 65536 counts of resolution at up to 10 KHz sample rate. The ADC available on the **FB** is especially notable for its low noise. Two 12-bit DAC chips (DAC7612, TI) can be installed providing 4 channels 0-4.095V analog voltage outputs capable of sinking or sourcing 5 mA. The **FB** allows access to mass storage CompactFlash cards (up to 2GB). Users can easily add mass data storage to their embedded application via RS232, TTL I2C, or parallel interface. Complete C/C++ programmable software

package includes compiler, remote debugger, samples, and file system libraries. Files on the CF can be easily accessed from a PC. An ultra-low quiescent current (35 μ A), low-drop voltage (85 mV) regulator (TPS76550, TI) can be installed. It allows operating power input as low as 5.1V. It can yield significant improvement in operating life for battery-power. You can also shut down the regulator with a TTL pin, reducing the quiescent current to 1 μ A.

Configuration

By default, the **FB** is configured with 40 MHz CPU and a linear regulator. The low power version FB runs 20 MHz and uses the low-drop regulator.

Ordering Information

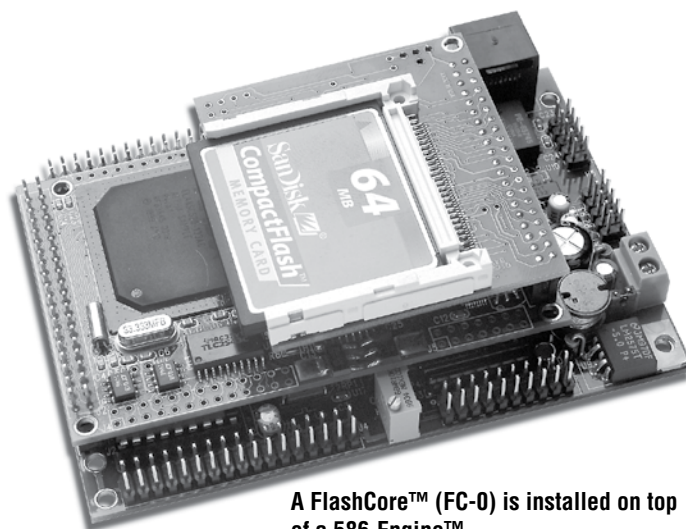

A FlashCore™ (FC-0) is installed on top of a 586-Engine™

Order Information:

FlashCore™ FC-0 **\$49/\$39/\$29/\$15** **Qty 1/50/100/1000**
Includes CF Interface, 20x2 header, and PAL

FB **\$99/\$84/\$69/\$34** **Qty 1/50/100/1000**
Includes: 40 MHz CPU, 128KB SRAM, 512KB Flash, EE, TTL I/Os, 2 RS232, 5V regulator, CF Interface.

NOT including add-on options. OEM option discounts available

Add-on options:

- 1) SRAM 512KB.....\$20
- 2) Real Time Clock (RTC1337)+Battery.....\$20
- 3) 8 ch. 16-bit ADC (ADS8344).....\$30
- 4) 2 ch. 12-bit DAC (DAC7612)x2.....\$20 x 2
- 5) Low Power, 20 MHz, TPS76550\$20



1724 Picasso Avenue, Davis, CA 95618 USA
Tel: 530-758-0180 • Fax: 530-758-0181
sales@tern.com http://www.tern.com