


# i386-Drive™ (ID)

## i386EX-based Controller

**32-bit Intel i386EX processor module with 70+ I/Os, UARTs, ADC, DAC, quadrature decoders**

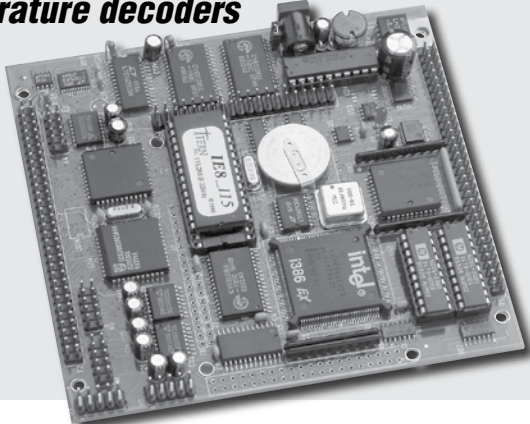

### Features:

- 4.7x 4.5 x 0.6"
- Power consumption: 300/160/80/30mA at 8.5/12/24/35V
- Power input: +8.5 to +12V/35V (linear/switching regulator\*)
- 32-bit CPU (Intel i386EX, 33MHz), C/C++ programmable
- 24 multiplexed I/Os, interrupts, DMA, 512-byte EE
- 48 bi-directional I/O lines from 2 PPIs
- Up to 3MB\* SRAM/Flash
- Up to 6 serial ports and RS-232/485 drivers \*
- Up to 2 quadrature decoders\*
- Real-time clock, battery \*
- One 100KHz,  $\pm 10V$ , 16-bit ADC and one 5 Hz 24-bit ADC \*
- Up to 22 12-bit ADC, two 12-bit DAC, and one 16-bit DAC \*
- One 100KHz, high speed 12-bit DAC \*
- PCMCIA and Ethernet interface via **MMB™**

\* optional

The **i386-Drive™ (ID)** is a compact, low-cost, high performance controller based on the 33MHz, 32-bit intel386EX™. It combines the powerful i386EX CPU and numerous peripherals on a single PCB, measuring 4.7" x 4.5".

The **ID** supports up to 512KB 8-bit SRAM, 512KB 8-bit Flash, 1MB 16-bit SRAM, and 1MB 16-bit Flash. A 512-byte serial EEPROM, which does not require battery backup, can be used as an additional memory device for storing important data.

An optional real-time clock (RTC) provides information on the year, month, date, hour, minute, second, 1/64 second. A lithium coin battery can be installed to back up both the SRAM and RTC.

Two asynchronous serial ports from the i386EX support reliable DMA-driven serial communications (up to 115,200 baud) with RS-232 drivers. The i386EX also offers a synchronous serial port. An optional UART SCC2691 and a dual UART SCC2692 can be added for a total of three asynchronous serial ports with RS-232 or RS-485 drivers.

Three PC-compatible, 16-bit programmable timers/counters can generate interrupts or count external events at a rate of up to 8MHz; they can also generate pulse outputs. Three 8-bit, multifunctional, user-programmable I/O ports are included in the i386EX. Four external interrupts are buffered by Schmitt-trigger

inverters and provide active low inputs. A supervisor chip (691) with a watchdog timer is on-board.

Two PPI chips (82C55) provide 48 user-programmable I/O lines totally free for application use. The optional SCC2692 UART provides 15 additional I/O lines.

The **ID** supports many optional ADC and DACs. Up to 22 channels of 12-bit ADC (TLC2543, 0-5V, 10 KHz), one 16-bit ADC (LTC1605,  $\pm 10V$ , 100 KHz), and one 24-bit ADC (LTC2400, 0-5V, 5 Hz) can be installed. Two 12-bit DACs (LTC1446, 0-4.095V, 10 KHz), one 100 KHz 12-bit DAC (LTC1450, 0-4.095V), and one 16-bit DAC (LTC1655, 0-4.095V, 10 KHz) are available.

Two quadrature decoders (HP2020) can interface to optical encoders for motion control uses. Schmitt-trigger inverters are provided. On-board expansion headers provide data lines, address lines, control signals, and pre-decoded chip select lines.

A 5V switching regulator (up to 35V DC input) can be installed to reduce power consumption and heat.

In "power-off" mode, the **ID** consumes very low ( $\mu A$ ) power. Users can turn off the switching regulator via software, and use the RTC or an external signal to turn it on.

A **MMB™** can be installed on the **ID** to provide an additional 33 channels of 12-bit ADC, 6 channels of 24-bit ADC, and 420MB of PCMCIA memory. An Ethernet interface may also be installed.

### Ordering Information

<b>ID</b>	<b>\$199/\$179/\$149/\$69</b>	<b>Qty 1/100/1K/5K+</b>
-----------	-------------------------------	-------------------------

Includes: i386EX 33MHz, 128KB SRAM, 2 RS-232, PPIs, watchdog, 512-byte EE, and 5V linear regulator.

**NOT including add-on options. OEM option discounts available.**

### Add-on Options:

- |   |           |
|---|-----------|
| 1) 8-bit SRAM: 512KB .....                                    | \$20      |
| 2) Debug ROM (IE8_0_115) or (ID16_0_115).....                 | \$20      |
| 3) Real-time clock (RTC) and battery.....                     | \$20      |
| 4) UART (SCC2691) w/ (a) RS-232 (default) or (b) RS-485 ..... | \$30      |
| 5) Dual UART (SCC2692) w/ (a) RS-232, or (b) RS-485.....      | \$40      |
| 6) 16-bit SRAM: (a) 128KB x2, or (b) 512KB x2 .....           | \$40/\$80 |
| 7) 16-bit Flash: (a) 256KW .....                              | \$40      |
| 8) 24-bit ADC (LTC2400) .....                                 | \$20      |
| 9) 16-bit ADC (LTC1605, 100KHz) .....                         | \$60      |
| 10) 11 ch. 12-bit ADC (TLC2543) up to 2 .....                 | \$20 each |
| 11) 2 ch. 12-bit DAC (LT1446).....                            | \$20      |
| 12) High-speed 12-bit DAC (LTC1450) .....                     | \$30      |
| 13) Switching regulator .....                                 | \$20      |
| 14) HP2020 Quadrature decoder (up to 2).....                  | \$30 each |

### Typical Order Example:

**386-Drive™**, 512 KB SRAM (8-bit), RTC & Battery

ID + 1 + 3 = \$199 + \$20 + \$20 = \$239

Note: 64KW=128KB, 256KW=512KB, 512KW=1MB



CE FC

1724 Picasso Avenue, Davis, CA 95618 USA  
Tel: 530-758-0180 • Fax: 530-758-0181

sales@tern.com

http://www.tern.com