


KDT750 & KDT900 Backup Battery Connection

This KDT750 or KDT900 unit contains a backup battery capable of powering the terminal when DC power or Power-over-Ethernet power is lost. This battery is shipped disconnected. Follow these steps to connect and test the backup battery operation.

1. With the back panel open, locate and connect the two RED “Fast-On” connectors together.



2. Press the main power safety switch with your finger to confirm proper battery connection. The green power LED will light, indicating that the system is receiving power.

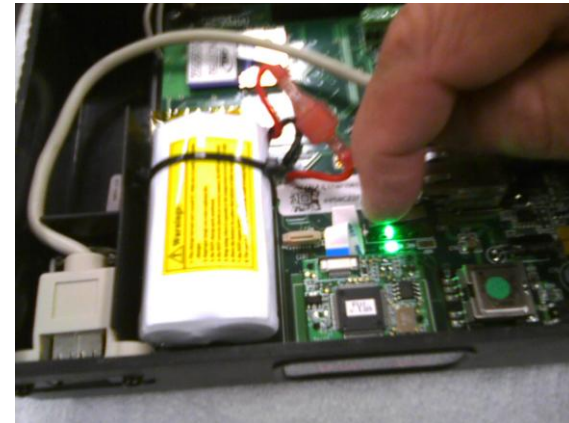

3. Release the safety switch and install the KDT750 or KDT900.

4. Make sure that the unit is powered on from an external power source (DC power or Power-over-Ethernet) for at least 12 hours before operating from the backup battery. If the backup battery has been fully drained from a power loss event, a charge cycle will take up to 24 hours.