

Kubota KA-100 Series

Battery-Powered Platform Scales



PART #	DESCRIPTION
51059	KA-100, 150 lb (60kg)
51060	KA-100, 300 lb (150kg)



Applications

- Shipping and Receiving
- Recycling
- Material Handling

Standard Features

- Capacities: 150 lb and 300 lb
- Automatic "auto ranging" to adjust division size based on capacity
- Large Liquid Crystal Display (LCD), 1.7" (43mm) character height
- Long battery life of approximately 1,000 hours.
- Ability to toggle between lb and kg from operating mode
- Auto Tare can tare up to 100% of scale capacity
- Over/under checkweighing displays instant "HI", "LO", or "OK" readout
- Counting function with selectable sampling

Options/Accessories

16413 AC Adapter, model 5268

The new KA-100 Kubota Bench Scale is ideal for shipping/receiving, recycling, and material handling applications. This functional scale has a large display that provides easy readability from any angle. Additionally, it features an extra-long battery life—approximately 1,000 hours on 6 D-cell batteries. It is available in 150 lb and 300 lb capacities and includes an automatic power-off function for operator convenience.

A handy counting function can be used to automatically count the number of items on the platform. An over/under checkweighing function is available to monitor product weight for the maximum or minimum weight allowance.

CAPACITY:

150 lb, 300 lb

DIVISIONS (AUTO RANGING):

150 lb: 0.02 lb from 0 lb - 60 lb, 0.05 lb from 60 lb - 150 lb

300 lb: 0.05 lb from 0 lb - 150 lb, 0.1 lb from 150 lb - 300 lb

MAX. TARE WEIGHT:

150 lb, 300 lb

SIZE OF PLATFORM:

14.6" (370mm) x 19.7" (500mm)

WEIGHT INDICATOR:

Liquid Crystal Display (LCD), 5 digits, character height: 1.7" (43mm), 7 segment characters

FUNCTIONS:

Zero reset

Taring

Preset Taring

Upper and lower limit comparison

Counting

Net / Gross weight display switching

Auto power-off

NUMBER OF SAMPLINGS:

5, 10, 20, 50, or 100 (selectable)

MAXIMUM PIECE COUNT:

150 lb: approx. 12,000

300 lb: approx. 15,000

OPERATING TEMPERATURE:

14° F to 104° F (-10 °C) to (40 °C)

POWER SUPPLY:6 D-cell Alkaline Batteries (batteries not included),
optional AC Adapter**BATTERY LIFE:**

Approx. 1,000 hours at 77°F

NET WEIGHT:

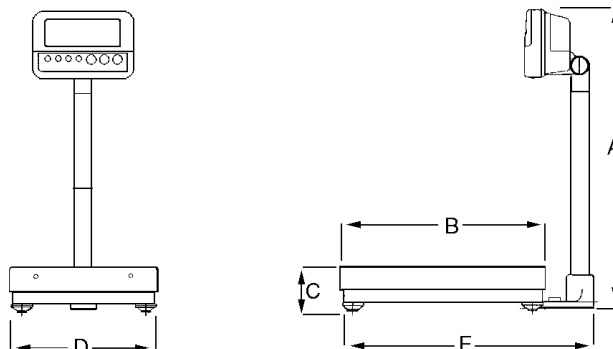
Approx. 28.67 lb (14 kg)

APPROVALS:

NTEP #98-184 Class III 1:3000

WARRANTY:

One year limited warranty

**DIMENSIONS**

A = 28.7" - 29.5" (730mm - 750mm)

B = 19.7" (500mm)

C = 4.02" - 4.8" (102mm - 122mm)

D = 14.6" (370mm)

E = 24.9" (633mm)