

MTX/MTB Series Bench Scales



MTB-60L

MTX-300L

PART #	DESCRIPTION
41446 MTX-60L, 60 lb, 30 lb, 15 lb
41450 MTB-60L, 60 lb, 30 lb, 15 lb
41447 MTX-300L, 300 lb, 150 lb, 60 lb
41451 MTB-300L, 300 lb, 150 lb, 60 lb

With multiple weighing ranges that can be changed with the touch of a key, the MTX/B Series can boost operational efficiency anywhere.

Weight verification, product counting, and data management will completely change the way you do business.

Applications

- Shipping & receiving areas
- Industrial processing


Standard Features

- Easy-to-read rotating display
- Liquid Crystal Display (LCD), (MTB models)
- Vacuum Fluorescent Display (VFD) (MTX models)
- Stainless steel platform cover
- Multiple weighing ranges
- Weight verification
- Counting & checkweighing modes
- Battery powered with 6 D-cell batteries (MTB models)

Options/Accessories

- 45101 Roller conveyor, front to back (MTX-300)
- 41817 Built-in journal printer (MTX models)
- 41814 RS-232 interface (MTX models)
- 42231 Additional operating manual

MTX-W Series "Splash-Proof" Bench Scales

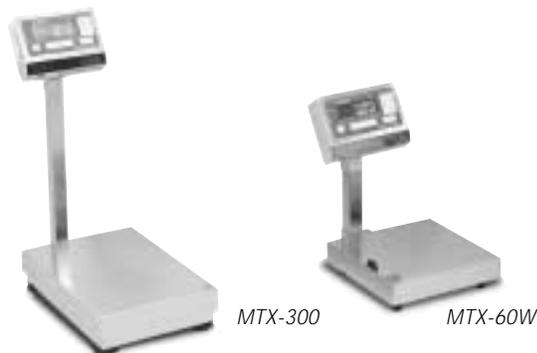

MTX-300

MTX-60W

PART #	DESCRIPTION
41448 MTX-60W, 60 lb
41449 MTX-300W, 300 lb



Ideal for food processing applications, the MTX-W Series is constructed of water resistant stainless steel.

The MTX-W Series offers several advanced features, including weight verification, product counting, data management, multiple weighing ranges and much more.

Applications

- Food processing
- Light washdown environments

Standard Features

- Easy-to-read adjustable display
- Vacuum Fluorescent Display (VFD)
- Stainless steel platform cover and indicator enclosure
- Multiple weighing ranges
- Weight verification
- Product counting
- Data management

Options/Accessories

- 42233 Additional operating manual

MTX-60L & MTX-300L:

DISPLAY:

Vacuum Fluorescent Display (VFD)

DISPLAY ITEMS:

Weight: 5 digits

Zero Point: ◀

Tare: ◀

Weight Check: over orange
accept green
under red

Capacity: green

Counting mode: orange

POWER CONSUMPTION:

6 watts

ELECTRICAL POWER:

AC, 115V, 10%, 50/60 Hz

CAPACITY:

60 lb, 30 lb, 15 lb (triple range) (MTX-60L)

300 lb, 150 lb, 60 lb (triple range) (MTX-300L)

MINIMUM GRADUATION:

0.02 lb, 0.01 lb, 0.005 lb, (MTX-60L)

0.1 lb, 0.05 lb, 0.02 lb, (MTX-300L)

WEIGHT:

27 lb (13 kg), MTX-60L

42 lb (19 kg), MTX-300L

DIMENSIONS:

13" x 12.25" x 3.5", MTX-60L

13.8" x 19.6" x 4.5", MTX-300L

APPROVALS:

NTEP certified per H-44, Class III, 3000d: CC #96-080A1,

USDA approved

WARRANTY:

One year limited warranty

MTB-60L & MTB-300L:

DISPLAY:

Liquid Crystal Display (LCD)

DISPLAY ITEMS:

Weight: 5 digits

Zero Point: ◀

Tare: ◀

Stability: *

Weight Check ▶: over, accept, under

Battery replacement: **B**

Capacity: ▼

Counting mode: ▼

POWER CONSUMPTION:

0.07 watts

ELECTRICAL POWER:

6 D-cell batteries (R20)

CAPACITY:

60 lb, 30 lb (dual range) (MTB-60L)

300 lb, 150 lb (dual range) (MTB-300L)

MINIMUM GRADUATION:

0.02 lb, 0.01 lb (MTB-60L)

0.1 lb, 0.05 lb (MTB-300L)

WEIGHT:

27 lb (13 kg), MTB-60L

42 lb (19 kg), MTB-300L

DIMENSIONS:

13" x 12.25" x 3.5", MTB-60L

13.8" x 19.6" x 4.5", MTB-300L

APPROVALS:

NTEP-certified per H-44, Class III, 3000d: CC #96-080A1

WARRANTY:

One year limited warranty

DISPLAY:

Vacuum Fluorescent Display (VFD)

DISPLAY ITEMS:

Weight: 5 digits

Zero Point: ◀

Tare: ◀

Weight Check: over orange
accept green
under red

Capacity: green

Counting mode: orange

POWER CONSUMPTION:

6 watts

ELECTRICAL POWER:

AC 115V, 10%, 50/60 Hz

OPERATING TEMPERATURE:

23°F to 104°F (-5°C to 40°C)

HUMIDITY:

20 - 85%

CAPACITY:

60 lb, 30 lb, 15 lb (triple range) (MTX-60W)

300 lb, 150 lb, 60 lb (triple range) (MTX-300W)

MINIMUM GRADUATION:

0.02 lb, 0.01 lb, 0.005 lb (MTX-60W)

0.1 lb, 0.05 lb, 0.02 lb (MTX-300W)

WEIGHT:

27 lb (13 kg), MTX-60W

42 lb (19 kg), MTX-300W

DIMENSIONS:

13" x 12.25" x 3.5", MTX-60W

13.8" x 19.6" x 4.5", MTX-300W

APPROVALS:

NTEP-certified per H-44, Class III, 3000d: CC #96-080A1, UL and C-UL listed

WARRANTY:

One year limited warranty