

KEYPAD

The membrane keypad has 3 tactile push buttons used to set time and date (page 34) as well as access the Aurora's *Configuration Mode* (page 15). An integrated light sensor window detects changing ambient light conditions.

The keypad connects to J10 on the Controller Board.

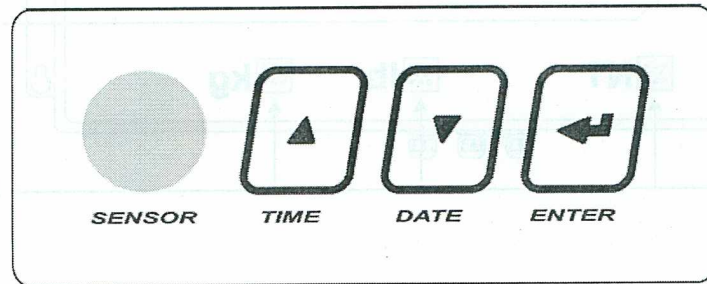


Fig. 2: Aurora Keypad

DIMENSIONS

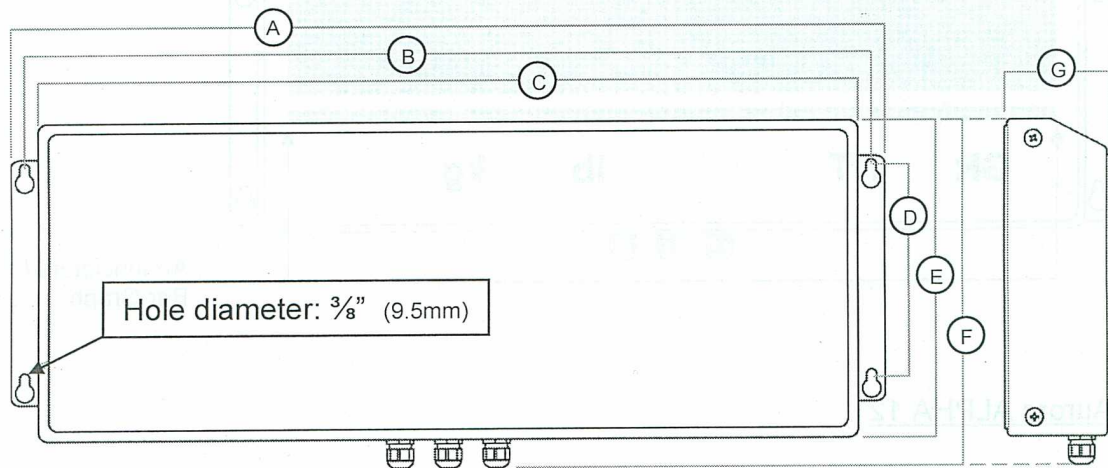


Fig. 3: Aurora Dimensions

Model	A	B	C	D	E	F	G	Weight
Aurora 45	24" 610mm	23" 584mm	22" 559mm	6" 152mm	8 7/8" 225mm	10 1/8" 257mm	3 1/2" 89mm	17 lb 7.75 kg
Aurora 65	32" 813mm	31" 787mm	30" 762mm	7 3/4" 197mm	11 3/4" 298mm	13" 330mm	3 1/2" 89mm	28 lb 12.7 kg
Aurora 45 SL	32" 813mm	31" 787mm	30" 762mm	7 3/4" 197mm	11 3/4" 298mm	13" 330mm	3 1/2" 89mm	28 lb 12.7 kg
Aurora Alpha 8	32" 813mm	31" 787mm	30" 762mm	7 3/4" 197mm	10 1/4" 260mm	11 1/2" 292mm	3 1/2" 89mm	23 lb 10.4 kg
Aurora Alpha 12	32" 813mm	31" 787mm	30" 762mm	7 3/4" 197mm	10 1/4" 260mm	11 1/2" 292mm	3 1/2" 89mm	23 lb 10.4 kg