

IQ PLUS® 310A DIGITAL WEIGHT INDICATOR

- 50 updates/second
- Selectable display update rate
- RATTLETRAP® vibration control
- Two communication ports,
(1) simplex, (1) full duplex
- Printer port selectable RS-232 or
20 mA current loop, EDP port RS0232
- 2 inputs for selectable TTL front-panel
key remote operation or keypad lockout



Measurement
Canada
Approved



Indicators/Remote Displays

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
22986	IQ plus 310A w/tilt stand, 115 VAC	9 lb	\$745.00
22987	IQ plus 310A w/panel mount, 115 VAC	9 lb	745.00
22988	IQ plus 310A, 115 VAC	9 lb	735.00
36069	IQ plus 310A w/Allen-Bradley Remote I/O & tilt stand, 115 VAC	13 lb	1,640.00
22989	IQ plus 310A NEMA 4 w/tilt stand, 115 VAC	9 lb	895.00
22990	IQ plus 310A NEMA 4 w/panel mount, 115 VAC	9 lb	895.00
22991	IQ plus 310A NEMA 4, 115 VAC	9 lb	885.00
36071	IQ plus 310A NEMA 4 w/Allen-Bradley Remote I/O and tilt stand, 115 VAC	13 lb	1,790.00
32709	IQ plus 310A, 230 VAC w/tilt stand	9 lb	745.00
36070	IQ plus 310A, 230 VAC, w/Allen-Bradley Remote I/O and tilt stand	13 lb	1,640.00
OPTIONS/ACCESSORIES			
35888	Allen-Bradley Remote I/O, 115 VAC (external)		895.00
36593	Allen-Bradley Remote I/O, 230 VAC (external)		895.00
49974	PROFIBUS® DP Interface, 115 VAC (external)		895.00
49975	PROFIBUS® DP Interface, 230 VAC (external)		895.00
30352	Panel mount kit		40.00
19355	BCD output, 115 VAC (external)		495.00
19366	Load cell port quick connect		95.00
19367	Serial port quick connect		95.00
22979	Additional operating manual		35.00
PRIMARY COMPONENT PARTS			
66853	Board assembly, CPU/display		595.00
23043	Board, AC power supply		350.00
23063	Overlay membrane switch		55.00
16473	250 mA fuse, 115 VAC		4.00
16474	125 mA fuse, 230 VAC		6.00

NOTE: Because A-B Remote I/O and Profibus DP interface with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

IQ PLUS® 355 DIGITAL WEIGHT INDICATOR

- Power for eight 350Ω load cells or sixteen 700Ω load cells
- Large 0.8" Light Emitting Diode (LED)
- NEMA 4X (18-gauge) stainless steel washdown enclosure-Nema 4X/IP66
- Front-panel configuration and calibration
- Two independent communication ports
- Two user programmable ticket formats, up to 300-characters each



Note: Replaces the IQ 350. Same features, same price, enhanced display!



Measurement
Canada
Approved



#51968 & #66729
\$495.00
until 4/01/01



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
51968	IQ plus 355, 115 VAC	10 lb	\$525.00
66729	IQ plus 355, 230 VAC, CE marked/OIML approved	10 lb	525.00
OPTIONS/ACCESSORIES			
43381	Analog output: selectable 0-10V, 4-20mA		250.00
52948	Panel mount kit		65.00
46030	Revolution™ Scale Software		No Charge
51980	Additional operating manual		35.00
PRIMARY COMPONENT PARTS			
52211	Board assembly, 115 VAC		345.00
52210	Board assembly, 230 VAC		345.00
39045	Overlay membrane panel		40.00
53848	160 mA TR5 subminiature fuses, 115 VAC		2.00
53881	80 mA TR5 subminiature fuses, 230 VAC		2.00

IQ PLUS® 390-DC BATTERY POWERED DIGITAL WEIGHT INDICATOR

- NEMA 4X/IP66-rated stainless steel enclosure
- Large 1" (25.4mm), six-digit Liquid Crystal Display (LCD)
- 6-button operation
- Power for four 350Ω load cells or eight 700Ω load cells
- Supports 4- and 6-wire load cell connections
- Configurable units multiplier
- EDP port for full duplex, RS-232 communications
- Powered by 6 "C" cell batteries for complete portability (batteries not included)
- AC adapter for 115 or 230 VAC power
- Configurable standby mode prolongs battery life
- RATTLETRAP® three-stage digital filtering
- Piece count mode



Measurement
Canada
Approved



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
48815	IQ plus 390-DC, battery powered with 115 VAC wall adapter	6.0 lb	\$595.00

(Continued on next page)

IQ PLUS® 390-DC (CONT.)

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
50064 IQ plus 390-DC battery powered with 230 VAC wall adapter	6.0 lb \$625.00
66727 IQ plus 390-DC, CE marked (voltage adapter sold separately)	6.0 lb 625.00
OPTIONS/ACCESSORIES			
65738 Livestock weighing option, AW 1.02		95.00
46030 Revolution™ Scale Software		No Charge
48820 Additional operating manual		35.00
PRIMARY COMPONENT PARTS			
49978 Power supply, 115 VAC		12.00
49977 Power supply, 230 VAC (2-pin Europe)		40.00
48790 Overlay membrane panel		45.00
49954 Board assembly		395.00

IQ PLUS® 590-DC BATTERY POWERED DIGITAL WEIGHT INDICATOR

- Full numeric keypad
- Portable counting
- Keyboard entry of average piece weight, tare weight, calibration, and sample size
- Display tare button
- Powered by 6 "C" cell alkaline batteries for complete portability (batteries not included)
- Revolution™ Scaleware support
- Three 300-character print ticket formats
- Power for four 350Ω load cells or eight 700Ω load cells
- Supports 4- and 6-wire load cell connections
- EDP port for full duplex, RS-232 communications
- NEMA 4X/IP66-rated stainless steel enclosure
- Large 1" (24.5mm), six-digit Liquid Crystal Display (LCD)
- AC adapter for 115 or 230 VAC power
- Configurable standby mode to prolong battery life
- RATTLETRAP® three-stage digital filtering
- Configurable units multiplier
- Configurable analog to digital measurement rate
- Self-resetting thermal fuse



Measurement
Canada
Approved



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
52486 IQ plus 590-DC, battery powered with 115 VAC wall adapter	6.5 lb \$625.00
52485 IQ plus 590-DC battery powered with 230 VAC wall adapter	6.5 lb 655.00
66728 IQ plus 590-DC, CE marked (voltage adapter sold separately)	6.5 lb 655.00
OPTIONS/ACCESSORIES			
46030 Revolution™ Scale software		No Charge
51778 Additional operating manual		35.00
PRIMARY COMPONENT PARTS			
49978 Power supply, 115 VAC		12.00
49977 Power supply, 230 VAC (2-pin Europe)		40.00
51972 Overlay membrane panel		55.00
52469 Board assembly		395.00

IQ PLUS® 510 DIGITAL WEIGHT INDICATOR

- Simple operation with 5-button keypad
- Selectable analog to digital measurement rate
- Large 0.75" Vacuum Fluorescent Display (VFD)
- NEMA 4X/IP66 stainless steel washdown enclosure
- Completely menu driven
- Two communication ports: (1) EDP port, full duplex RS-232 or RS-485, (1) printer port, simplex RS-232 or 20 mA
- Six programmable ticket formats, up to 300 characters each
- Completely menu-driven
- Front-panel or EDP serial interface calibration
- 5-point linearization calibration



Sloped face model shown



Measurement
Canada
Approved



ANOTHER **REVOLUTION** SOLUTION



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
44543	IQ plus 510, 115 VAC, sloped face	10 lb	\$745.00
44542	IQ plus 510, 230 VAC, sloped face	10 lb	745.00
45526	IQ plus 510, 115 VAC, flat face, deep enclosure	10 lb	765.00
46041	IQ plus 510, 230 VAC, flat face, deep enclosure	10 lb	765.00
52054	IQ plus 510, CE 230 VAC, sloped face	10 lb	815.00
52053	IQ plus 510, CE 230 VAC, flat face, deep enclosure	10 lb	835.00
OPTIONS/ACCESSORIES			
43381	Analog output: selectable 0-10V, 4-20 mA		250.00
45409	Allen-Bradley Remote I/O (internal)		595.00
49976	PROFIBUS® DP Interface kit (internal)		595.00
45410	Panel mount kit (flat face only)		65.00
46030	Revolution™ Scale Software		No Charge
45390	Additional operating manual		55.00
PRIMARY COMPONENT PARTS			
64948	Board assembly, 115 VAC		495.00
64949	Board assembly, 230 VAC		495.00
41385	Switch panel membrane		55.00
45484	160 mA TR5 subminiature fuses, 115 VAC		2.00
45107	80 mA TR5 subminiature fuses, 230 VAC		2.00

NOTE: Because A-B Remote I/O and Profibus DP interface with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

IQ PLUS® 710 DIGITAL WEIGHT INDICATOR

- Sloped enclosure will accommodate Allen-Bradley Remote I/O with analog output or one 4-channel relay output board with analog output
- Flat face deep enclosure will accommodate all options
- Multiple tare registers for truck scales
- 300-ID truck in/out programs (6 modes)
- 8 digital inputs plus 8 digital outputs
- Two communication ports: (1) EDP port, full duplex RS-232 or RS-485, (1) printer port, simplex RS-232 or 20 mA
- Programmable consecutive numbering
- Batching and continuous mode setpoint functions
- Large 0.71" Vacuum Fluorescent Display (VFD)
- NEMA 4X stainless steel washdown enclosure
- Completely menu-driven
- Operate, configure and calibrate via front panel or EDP serial command port
- Selectable analog to digital measurement rate
- 5-point linearization calibration
- 4 macros—30 steps each, ability to interconnect macros with setpoints (macro can start batch setpoints)



Sloped face model shown



Measurement
Canada
Approved



Indicators/Remote Displays

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
44545	IQ plus 710, 115 VAC, sloped face	10 lb	\$895.00
44544	IQ plus 710, 230 VAC, sloped face	10 lb	895.00
45527	IQ plus 710, 115 VAC, flat face, deep enclosure	10 lb	915.00
45528	IQ plus 710, 230 VAC, flat face, deep enclosure	10 lb	915.00
52052	IQ plus 710, CE 230 VAC, sloped face	10 lb	995.00
52051	IQ plus 710, CE 230 VAC, flat face, deep enclosure	10 lb	1,015.00

OPTIONS/ACCESSORIES

43381	Analog output: selectable 0-10V, 4-20 mA	250.00
45409	Allen-Bradley Remote I/O (internal)	595.00
49976	PROFIBUS® DP Interface kit (internal)	595.00
45408	4-channel internal relay board (requires two for 8 relays)	130.00
45410	Panel mount kit (flat face only)	65.00
19369	Batching start/stop switch box	260.00
46030	Revolution™ Scale Software	No Charge
45391	Additional operating manual	55.00

PRIMARY COMPONENT PARTS

64956	Board assembly, 115 VAC	495.00
64960	Board assembly, 230 VAC	495.00
41386	Switch panel membrane	60.00
45484	160 mA TR5 subminiature fuses, 115 VAC	2.00
45107	80 mA TR5 subminiature fuses, 230 VAC	2.00

I/O RELAY MODULES SOLD SEPARATELY

15969	G4IDC5 10-32 VDC Input relay module, white (N/O)	30.00
15970	G40DC5R Dry contact 100 VDC/1.5 A output, red (N/O)	35.00
22848	G40DC5R5 Dry contact 100 VDC/1.5 A output, red (N/C)	28.00
15971	G40AC5 115 VAC Output relay module, black (N/O)	28.00
15972	G4IAC5 115 VAC Input relay module, yellow (N/O)	30.00
22847	G40AC5A5 115/230 VAC Output relay module, black (N/C)	28.00
36632	G40AC5A 115/230 VAC Output relay module, black (N/O)	28.00
36631	G4IAC5A 230 VAC Input relay module, yellow (N/O)	28.00
16478	Quencharc arc suppressor	11.00

NOTE: Because A-B Remote I/O and Profibus DP interface with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

IQ PLUS® 800 DIGITAL WEIGHT INDICATOR

- NEMA 4X stainless steel enclosure
- 3 digital inputs, TTL or hard contact closure, 4 TTL digital outputs standard, expandable to 16
- Multifunctional 200 ID truck in/out program
- Multi-scale control expandable to 2 scale inputs with independent scale setup**
- Power for up to sixteen 350W load cells on single or dual channels**
- Consecutive numbering for print ticket
- ID number entering from keypad
- Formattable print tickets for Gross, Net, Truck Weigh-In/Weigh-Out, and setpoint push print ticket



Measurement
Canada
Approved



ANOTHER **REVOLUTION** SOLUTION



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
40943	IQ plus 800-3A Desktop, 115 VAC	19 lb	\$1,195.00
36072	IQ plus 800-3A Desktop, 115 VAC w/Allen-Bradley Remote I/O	23 lb	2,090.00
41226	IQ plus 800-3B Desktop, 230 VAC	19 lb	1,195.00
36073	IQ plus 800-3B Desktop, 230 VAC w/Allen-Bradley Remote I/O	23 lb	2,090.00
41227	IQ plus 800-3A Dual Channel Desktop, 115 VAC	19 lb	1,395.00
41228	IQ plus 800-3B Dual Channel Desktop, 230 VAC	19 lb	1,395.00
41229	IQ plus 800x-3A Jetpak™ Desktop, 115 VAC*	19 lb	1,295.00
41230	IQ plus 800x-3B Jetpak™ Desktop, 230 VAC*	19 lb	1,295.00
23140	Uncased version, 115 VAC	10 lb	1,045.00
OPTIONS/ACCESSORIES			
61138	Dual range option		195.00
35888	Allen-Bradley Remote I/O, 115 VAC (external)		895.00
36593	Allen-Bradley Remote I/O, 230 VAC (external)		895.00
49974	PROFIBUS® DP Interface, 115 VAC (external)		895.00
49975	PROFIBUS® DP Interface, 230 VAC (external)		895.00
41932	Panel mount kit		65.00
46030	Revolution™ Scale Software		No Charge
19363	48-segment LED bar graph module		195.00
19357***	Analog output module 0-10 VDC/4-20mA		240.00
19372	RS-485 serial communication		25.00
19374	20 mA full duplex EDP port		25.00
19369	Batching start/stop switch box		260.00
19362	12-channel digital setpoint output module		165.00
16418	5 VDC power supply for digital output (for external mounting)		110.00
19365	4-channel relay rack, relays sold separately (for external mounting)		120.00
36080	4-channel relay rack w/relays (internal mount)		395.00
30549	2-channel relay rack w/relays (internal mount)		125.00
19373	16-channel relay rack, relays sold separately (for external mounting) (Requires Part# 19362 setpoint expander board)		279.00
PRIMARY COMPONENT PARTS			
36393	Board assembly, CPU		495.00
36584	Board assembly, power supply/display		560.00
19623	Overlay, membrane switch		60.00
16473	250 mA fuse, 115 VAC		4.00
16474	125 mA fuse, 230 VAC		6.00

(Continued on next page)

* Not Legal-For-Trade U.S./Canada

** This feature is available on specific models. Optional hardware/software may be required to add this feature to existing field units.

*** One analog module per channel (dual scale only). Second analog module must be installed on expansion board.

NOTE: Because A-B Remote I/O and Profibus DP interface with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

IQ PLUS® 800 (CONT.)

PART #	DESCRIPTION	SUGGESTED LIST PRICE
--------	-------------	----------------------

I/O RELAY MODULES SOLD SEPARATELY:

15969	G4IDC5 10-32 VDC Input relay module, white (N/O)	\$30.00
15970	G40DC5R Dry contact 100 VDC/1.5 A output, red (N/O)	35.00
22848	G40DC5R5 Dry contact 100 VDC/1.5 A output, red (N/C)	28.00
15971	G40AC5 115 VAC Output relay module, black (N/O)	28.00
15972	G4IAC5 115 VAC Input relay module, yellow (N/O)	30.00
22847	G40AC5A5 115/230 VAC Output relay module, black (N/C)	28.00
36632	G40AC5A 115/230 VAC Output relay module, black (N/O)	28.00
36631	G4IAC5A 230 VAC Input relay module, yellow (N/O)	28.00
16478	Quencharc arc supressor	11.00

NOTE: Because A-B Remote I/O and Profibus DP interface with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

IQ PLUS® 810 DIGITAL WEIGHT INDICATOR

- NEMA 4 zinc die-cast enclosure
- Bright, bold Vacuum Fluorescent Display (VFD)
- 20 updates/second
- RATTLETRAP® vibration control
- 20 programmable setpoint steps
- 3 digital inputs, TTL or hard contact closure; 4 TTL digital outputs, expandable to 16
- Multifunctional 200 ID truck in/out program
- 2 communication ports: (1) EDP port, full duplex RS-232 or 20 mA(1) printer port, simplex RS-232/20 mA current loop
- Multi-scale control expandable to 4 scale inputs, with individual scale setup**
- Power for up to sixteen 350Ω load cells on single or multiple channels**



Measurement
Canada
Approved



ANOTHER
EVOLUTION. SOLUTION



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
19249	IQ plus 810-3A Desktop, 115 VAC	15 lb	\$1,195.00
36074	IQ plus 810-3B Desktop, 115 VAC		
	w/Allen-Bradley Remote I/O	19 lb	2,090.00
19250	IQ plus 810-3B Desktop, 230 VAC	15 lb	1,195.00
36075	IQ plus 810-3B Desktop, 230 VAC		
	w/Allen-Bradley Remote I/O	19 lb	2,090.00
19265	IQ plus 810-3A Dual Channel Desktop, 115 VAC	19 lb	1,395.00
19266	IQ plus 810-3B Dual Channel Desktop, 230 VAC	19 lb	1,395.00
22176	IQ plus 810x-3A Jetpak™ Desktop, 115 VAC*	19 lb	1,295.00
22177	IQ plus 810x-3B Jetpak™ Desktop, 230 VAC*	19 lb	1,295.00
23140	Uncased version, 115 VAC	10 lb	1,045.00

OPTIONS/ACCESSORIES

61138	Dual range option	195.00
35888	Allen-Bradley Remote I/O, 115 VAC (external)	895.00
36593	Allen-Bradley Remote I/O, 230 VAC (external)	895.00
49974	PROFIBUS® DP Interface, 115 VAC (external)	895.00

* Not Legal-For-Trade U.S./Canada

** This feature is available on specific models. Optional hardware/software may be required to add this feature to existing field units.

(Continued on next page)

PART #	DESCRIPTION	SUGGESTED LIST PRICE
OPTIONS/ACCESSORIES		
49975	PROFIBUS® DP Interface, 230 VAC (external)	\$895.00
19364	Panel mount kit	25.00
46030	Revolution™ Scaleware Software	No Charge
19353	Wall mount bracket	75.00
19363	48-segment LED bar graph module	195.00
40386	Dual load cell input module expansion board (3rd and 4th scale)	640.00
40385***	Expansion board assembly (keyboard connection only)	250.00
19357***	Analog output module, 0-10 VDC/4-20 mA	240.00
19372	RS-485 serial communication	25.00
19374	20 mA full duplex EDP port	25.00
19362	12-channel digital setpoint output module	165.00
16418	5 VDC power supply for digital output	110.00
19369	Batching start/stop switch box	260.00
19365	4-channel relay rack kit, relays sold separately	120.00
19373	16-channel relay rack, relays sold separately (for external mounting) (Requires Part# 19362 setpoint expander board)	279.00
*** One analog module per channel (dual scale only). Second analog module must be installed on expansion board.		

PRIMARY COMPONENT PARTS		
36393	Board assembly, CPU	495.00
36584	Board assembly, power supply/display	560.00
19623	Overlay, membrane switch	60.00
16473	250 mA fuse, 115 VAC	4.00
16474	125 mA fuse, 230 VAC	6.00

I/O RELAY MODULES SOLD SEPARATELY:		
15969	G4IDC5 10-32 VDC Input relay module, white (N/O)	30.00
15970	G40DC5R Dry contact 100 VDC/1.5 A output, red (N/O)	35.00
22848	G40DC5R5 Dry contact 100 VDC/1.5 A output, red (N/C)	28.00
15971	G40AC5 115 VAC Output relay module, black (N/O)	28.00
15972	G4IAC5 115 VAC Input relay module, yellow (N/O)	30.00
22847	G40AC5A5 115/230 VAC Output relay module, black (N/C)	28.00
36632	G40AC5A 115/230 VAC Output relay module, black (N/O)	28.00
36631	G4IAC5A 230 VAC Input relay module, yellow (N/O)	28.00
16478	Quencharc arc suppressor	11.00

NOTE: Because A-B Remote I/O and Profibus DP interface with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

PROFIBUS® DP INTERFACE

- DP intelligent slave
- Open configuration permits plug & play
- Autosensing baud rate up to 12 megabaud
- 4-word, 8-bit format
- Generates up to 20-bit word
- Fast data exchange, less than 10 milli-seconds
- Supports sync & freeze mode
- RS-232 or 20 mA interface



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
49974	PROFIBUS DP Interface, 115 VAC (external)	6 lb	\$895.00
49975	PROFIBUS DP Interface, 230 VAC (external)	6 lb	895.00
49976*	PROFIBUS DP Interface kit, (internal)	2 lb	595.00
* For use with IQ plus 510 & 710			

OPTIONS/ACCESSORIES			
50955	Operating manual, external version (800/810/310A)		35.00
52579	Operating manual, internal version (510/710)		35.00

NOTE: Because this product interfaces with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

ALLEN-BRADLEY REMOTE I/O

- 115 or 230 VAC operation
- Discrete data transfer
- Block data transfer
- Field-retrofitting available for existing IQ plus 310A, 510, 710, and 800/810 indicators
- Blind keypad capability (IQ plus® 800/810)
- NEMA 4X stainless steel enclosure



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
35888	Allen-Bradley Remote I/O, 115 VAC	4 lb	\$895.00
36593	Allen-Bradley Remote I/O, 230 VAC	4 lb	895.00
45409	Allen-Bradley Remote I/O, (internal)	2 lb	595.00

OPTIONS/ACCESSORIES

36254	Operating manual, external version (800/810/310A)	35.00
45775	Operating manual, internal version (510/710)	35.00

NOTE: Because this product interfaces with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.


CONDEC™ UMC222 DIGITAL WEIGHT INDICATOR



- Easy-to-use front panel configuration
- Adjustable high-performance digital filter
- Smart Serial™ ticket formatting
- Adjustable digital filter for low frequency vibration
- NEMA 4X stainless steel enclosure
- Time and date
- 10-digit totalizer
- Supports 4- and 6-wire connections
- Count mode
- One digital output/input



UMC222 PART NUMBERING GUIDE

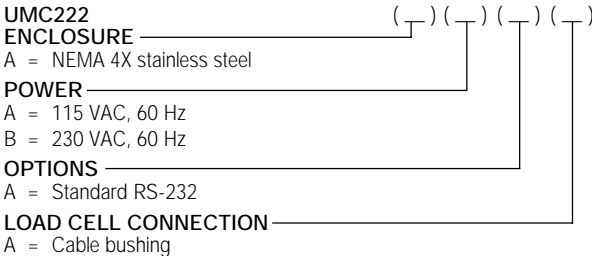

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
115 VAC			
65479	UMC222AAAA, 115 VAC	5 lb	\$595.00
65510	UMC222ABAA, 230 VAC	5 lb	595.00
OPTIONS/ACCESSORIES			
55255	Serial expander assembly (RS-485, RS-422, 20 mA loop)	145.00	
55262	Panel mount bracket	35.00	
55268	Battery option	175.00	
64983	Additional operating manual	35.00	

CONDEC™ UMC444 DIGITAL WEIGHT INDICATOR

- Four-button operation
- Mild steel NEMA 1 enclosure
- Tilt stand base
- Front-panel calibration
- Zero, Net/Gross, Tare and Print keys



Measurement
Canada
Approved



UMC444 PART NUMBERING GUIDE

UMC444 _____ () () () ()
ENCLOSURE _____

- A = Mild steel painted enclosure with tilt stand
- B = Mild steel painted enclosure with panel mount brackets
- C = Uncased board set
- D = NEMA 4X stainless steel enclosure

INPUT POWER _____

- A = 115 VAC, 60 Hz
- B = 230 VAC, 50 Hz
- C = 12 VDC (external output)
- D = 115 VAC with battery option (part #19577)
- E = 230 VAC with battery option (part #19577)

OPTIONS _____

- B = Duplex serial (RS-232 or 20 mA)

LOAD CELL TERMINATION _____

- C = RFI - shielded
- D = RFI - shielded with load cell connector

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
115 VAC			
61264	UMC444AABC	7.5 lb	\$745.00
62084	UMC444BABC	7.5 lb	745.00
61256	UMC444CABC	7.5 lb	655.00
62070	UMC444DABC	7.5 lb	895.00
61563	UMC444ADBC	7.5 lb	870.00
61265	UMC444AABD	7.5 lb	780.00
62086	UMC444BABD	7.5 lb	780.00
62941	UMC444BADB-14 (internal BCD)	8 lb	755.00
12 VDC (External input)			
62413	UMC444DCBC	7.5 lb	845.00
230 VAC			
61357	UMC444ABBC	7.5 lb	745.00
62248	UMC444BBBC	7.5 lb	745.00
62250	UMC444BBBD	7.5 lb	780.00
<i>All other part number configurations are available as special order units.</i>			
OPTIONS/ACCESSORIES			
19576	BCD output, external, 115 VAC		545.00
55458	BCD output, external, 230 VAC		545.00
19578	Analog output, 0-10/4-20 mA, 115 VAC		545.00
55469	Analog output, 0-10/4-20 mA, 230 VAC		545.00
19577	Battery pack, 115/230 VAC		160.00
56116	RS-485 serial expander		195.00
16815	Technical manual		85.00
16819	Additional operating manual		35.00

CONDEC™ UMC555 DIGITAL WEIGHT INDICATOR


- Four-button operation
- Mild steel NEMA 1 enclosure
- Tilt stand base
- Front-panel calibration
- Zero, Net/Gross, Tare and Print keys



Measurement
Canada
Approved



UMC555 PART NUMBERING GUIDE

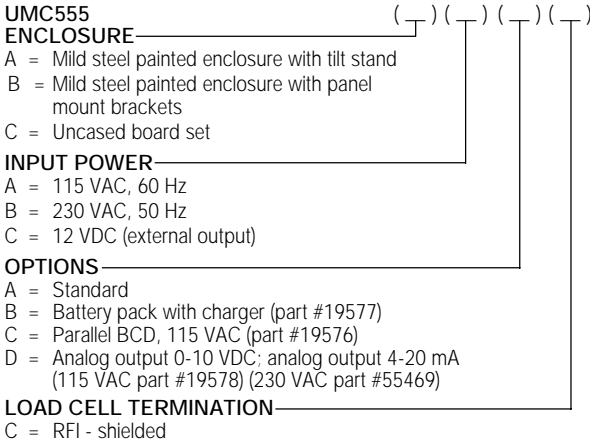

Indicators/Remote Displays

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
115 VAC			
19189	UMC555AAAC	7.5 lb	\$850.00
61959	UMC555BAAC	7.5 lb	850.00
61178	UMC555CAAC	7.5 lb	655.00
61224	UMC555AACC	7.5 lb	1,365.00
61237	UMC555AADC	7.5 lb	1,365.00
62018	UMC555BADC	7.5 lb	1,365.00
61869	UMC555AAAC-35 (internal BCD)	8 lb	1,050.00
64572	UMC555BAAC-35 (internal BCD)	8 lb	1,050.00
12 VDC (External input)			
61363	UMC555CCAC	7.5 lb	600.00
62269	UMC555BCAC	7.5 lb	800.00
230 VAC			
61279	UMC555ABAC	7.5 lb	850.00
61290	UMC555ABBC	7.5 lb	975.00
<i>All other part number configurations are available as special order units.</i>			
OPTIONS/ACCESSORIES			
19576	BCD output, external, 115 VAC		545.00
55458	BCD output, external, 230 VAC		545.00
19578	Analog output, 0-10/4-20 mA, 115 VAC		545.00
55469	Analog output, 0-10/4-20 mA, 230 VAC		545.00
19577	Battery pack, 115/230 VAC		160.00
56116	RS-485 serial expander		195.00
16815	Technical manual		85.00
16819	Additional operating manual		35.00

CONDEC™ UMC600 DIGITAL WEIGHT INDICATOR

- Surge protection board
- Auto/manual batching modes
- 80,000 display graduations available
- RFI/EMI shielded
- Easy digital configuration and calibration
- Four control inputs/outputs
- Truck in/out weighing mode, 300 truck ID storage
- One 10-digit accumulator
- 5-point linearization
- Keyboard customized serial output
- Time and date
- Front panel key lockout
- Temperature compensated -18° to 72°F (-10° to 40°C)



Measurement
Canada
Approved



UMC600 PART NUMBERING GUIDE

UMC600 _____ () () () ()
ENCLOSURE _____

- A = Stainless steel with tilt stand
- B = Stainless steel with panel mount brackets
- D = Flange Mount

INPUT POWER _____

- A = 115 VAC, 60 Hz
- B = 230 VAC, 50 Hz
- C = 115 VAC, 60 Hz with battery option (part #55649)
- D = 230 VAC, 50 Hz with battery option (part #55649)
- E = 12 VDC (external input)
- F = 115 VAC with analog output option 0-10 VDC;
4-20 mA (part #55660)
- G = 230 VAC with analog output option 0-10 VDC;
4-20 mA (part #55660)
- H = 115 VAC with relay output option (solid state)
(part #55653)
- J = 230 VAC with relay output option (solid state)
(part #55653)
- K = 115 VAC with analog & relay output option 0-10 VDC;
4-20 mA output, 4 SS relays (part #55662)
- L = 230 VAC with analog & relay output option 0-10 VDC;
4-20 mA, 4 SS relays (part #55662)

DISPLAY _____

- A = Light Emitting Diode (LED)
- B = Liquid Crystal Display (LCD)

LOAD CELL TERMINATION _____

- C = RFI - shielded 6-wire connector

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
115 VAC			
19198	UMC600AAAC	11 lb	\$1,025.00
55623	UMC600BAAC	11 lb	1,025.00
61652	UMC600DAAC	11 lb	1,125.00
59659	UMC600ACAC	11 lb	1,090.00
54117	UMC600AFAC	11 lb	1,255.00
54722	UMC600AHAC	11 lb	1,245.00
55622	UMC600AKAC	11 lb	1,540.00
56231	UMC600BCAC	11 lb	1,090.00

(Continued on next page)

CONDEC™ UMC600 (CONT.)

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
115 VAC (Cont.)			
57186	UMC600BFAC	11 lb	\$1,257.00
57774	UMC600BHAC	11 lb	1,245.00
62337	UMC600DHAC	11 lb	1,345.00
59057	UMC600AABC	11 lb	1,025.00
59709	UMC600ACBC	11 lb	1,090.00
55657	UMC600AKBC	11 lb	1,540.00
12 VDC (External input)			
62934	UMC600AEAC	11 lb	1,025.00
56864	UMC600BEAC	11 lb	1,025.00
230 VAC			
59318	UMC600ABAC	11 lb	1,025.00
55960	UMC600BBAC	11 lb	1,025.00
58514	UMC600BJAC	11 lb	1,245.00
59295	UMC600BLAC	11 lb	1,540.00
<i>All other part number configurations are available as special order units.</i>			
OPTIONS/ACCESSORIES			
55633	Relay board with solid state relays (old style), KBT7116-11		230.00
55637	Relay board with dry contact relays (old-style), KBT7116-12		230.00
55649	Battery, KBT7116-14		79.25
55653	Relay board with four solid state relays (new style), KBT7116-16		245.00
55658	Analog kit (no board), KBT7116-17		215.00
55660	Analog kit (no board), KBT7116-18		230.00
55662	Relay and analog output board, KBT7116-19		460.00
16815	Technical manual		85.00
30261	Additional operating manual		35.00

Indicators/Remote Displays

CONDEC™ UMC612 DIGITAL WEIGHT INDICATOR

- Bi-polar resolution up to 1,000,000 counts
- EMI/RFI shielding
- Dual serial ports
- Time and date
- NEMA 4X stainless steel
- Multi-line display, six digits for weight and 16 alpha-numeric for process status information
- Digital and selective 2Hz analog filtering
- Active temperature compensation for zero and span
- Automatic gain adjustment
- Selectable conversion rate
- 10-point linearity compensation
- Automatic dead load compensation
- Rate-by-weight and peak hold
- Eight setpoints outputs and four process inputs
- Programmable batch sequence and print format
- Full serial control with 20mA, RS-232, RS-422 or RS-485



Measurement
Canada
Approved

UMC612 PART NUMBERING GUIDE

UMC612

ENCLOSURE

- A = Tilt stand
- B = Panel mount brackets
- C = Flange mount assembly

INPUT POWER

- A = 115 VAC, 60 Hz
- B = 230 VAC, 50 Hz

OUTPUT OPTIONS

- A = Standard
- B = Relay output option; four solid state relays (part #55653)
- C = Analog output option 0-10 VDC; 4-20 mA output (includes option B) (part #55660)

LOAD CELL TERMINATION

- A = Standard
- B = Connector

() () () ()

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
115 VAC			
56701	UMC612AAAA	10 lb	\$1,455.00
61847	UMC612AABA	10 lb	1,685.00
61862	UMC612AACA	10 lb	1,895.00
62901	UMC612BACA	10 lb	1,895.00
61845	UMC612CACA	10 lb	1,995.00
61837	UMC612AAAB	10 lb	1,490.00
61866	UMC612AACB	10 lb	1,930.00
230 VAC			
61928	UMC612CBAA	10 lb	1,555.00
<i>All other part number configurations are available as special order units.</i>			
OPTIONS/ACCESSORIES			
55653	Relay board with four solid state relays (new-stlye), KBT7116-16		245.00
55658	Analog kit (no board), KBT7116-17		215.00
55660	Analog kit (no board), KBT7116-18		230.00
55662	Relay and analog output board, KBT7116-19		460.00
55665	RS-485 serial output		25.00
55825	Additional operating manual		35.00

Indicators/Remote Displays

IQ 700HB DIGITAL WEIGHT INDICATOR

- Bright Light Emitting Diode (LED) display
- AC powered
- Stainless steel NEMA 4X enclosure
- Front-panel digital calibration
- Automatic zero and span temperature compensation
- Excitation for eight 350W load cells at 10 VDC
- Two fully-programmable setpoints with "Zero Band"
- Two serial ports offering bidirectional RS-232 or 20 mA current loop, and simplex RS-232 or 20 mA current loop
- 300-truck ID memory



Measurement
Canada
Approved



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
19191 IQ 700HB LED display, 115 VAC	14 lb	\$1,025.00
34752 IQ 700HB LED display, 230 VAC	14 lb	1,025.00
OPTIONS/ACCESSORIES			
30352 KBT7116-5 Panel mount kit		40.00
19281 2 Unlatched solid state output relays		200.00
15959 Unlatched dry contact 4-relay board		225.00
19576 BCD output (external)		545.00
19578 Analog output, 0-10 VDC or 4-20 mA		545.00
22922 Analog output, 0-10 VDC or 4-20 mA (internal mount)		545.00
55662 Combination relay and analog board		460.00
16815 Technical manual		85.00
16821 Additional operating manual		35.00

SURVIVOR® 555 HOSTILE ENVIRONMENT INDICATOR

- NEMA 4X Fiberglass-Reinforced Polyester (FRP) enclosure
- Rubber-booted SURVIVOR watertight switches
- Nylon watertight cable fittings
- High-visibility, bright red 0.8" Light Emitting Diode (LED) display
- 115 VAC, 230 VAC available



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
19156 SURVIVOR 555 HE, 115 VAC	13 lb	\$1,395.00
OPTIONS/ACCESSORIES			
19298 Internal thermostatically-controlled heater		205.00
19576 BCD output		545.00
19341 Battery option		164.00
19578 Analog output, 0-10 VDC/4-20 mA		545.00
16819 Additional operating manual		35.00

IQ PLUS® 810HE/810SS DIGITAL WEIGHT INDICATORS

- NEMA 4X Fiberglass-Reinforced Polyester (FRP) wall mount enclosure/NEMA 4X stainless steel enclosure
- (IQ plus 810 HE) Rubber booted SURVIVOR® watertight switches
- Bright, bold Vacuum Fluorescent Display (VFD)
- 20 programmable setpoint steps
- Selectable print data and format via EDP port or front panel
- Multi-scale control expandable to 4 scale inputs, with individual scale setup**
- Power for up to sixteen 350W load cells on single or multiple channels**



IQ plus 810HE



IQ plus 810SS



Measurement
Canada
Approved



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
36917	HE FRP Enclosure, 115 VAC	17 lb	\$1,695.00
36918	HE FRP Enclosure, 230 VAC	17 lb	1,695.00
36919	HE Dual Channel, 115 VAC	18 lb	1,895.00
36920	HE Dual Channel, 230 VAC	18 lb	1,895.00
36921	HE Jetpak™, 115 VAC*	22 lb	1,795.00
36922	HE Jetpak™, 230 VAC*	22 lb	1,795.00
19251	SS NEMA 4X, 115 VAC	24 lb	1,695.00
19252	SS NEMA 4X, 230 VAC	24 lb	1,695.00
19263	SS Dual Channel, 115 VAC	25 lb	1,895.00
19264	SS Dual Channel, 230 VAC	25 lb	1,895.00
22174	SS Jetpak™, 115 VAC*	25 lb	1,795.00
22175	SS Jetpak™, 230 VAC*	25 lb	1,795.00

* Not Legal-For-Trade U.S./Canada

** This feature is available on specific models. Optional hardware/software may be required to add this feature to existing field units.

OPTIONS/ACCESSORIES

61138	Dual range option	195.00
35888	Allen-Bradley Remote I/O, 115 VAC (external)	895.00
36593	Allen-Bradley Remote I/O, 230 VAC (external)	895.00
49974	PROFIBUS® DP Interface, 115 VAC (external)	895.00
49975	PROFIBUS® DP Interface, 230 VAC (external)	895.00
46030	Revolution™ Scale Software	No Charge
19363	48-segment LED bar graph module	195.00
40386	Dual load cell input module expansion board (3rd and 4th scale)	640.00
40385***	Expansion board assembly (keyboard connection only)	250.00
19357***	Analog output module, 0-10 VDC/4-20 mA	240.00
19372	RS-485 serial communication	25.00
19374	20 mA full duplex EDP port	25.00
19362	12-channel digital setpoint output module	165.00
16418	5 VDC power supply for digital output	110.00
19368	Batching start/stop switch box	260.00
19365	4-channel relay rack kit, relays sold separately	120.00
19373	16-channel relay rack kit, relays sold separately (Requires PN# 19362 setpoint expander board)	279.00
42100	Additional operating manual (Version 3)	55.00

*** One analog module per channel (dual scale only). Second analog module must be installed on expansion board.

(Continued on next page)

IQ PLUS® 810HE/810SS (CONT.)

PART #	DESCRIPTION	SUGGESTED LIST PRICE
--------	-------------	----------------------

PRIMARY COMPONENT PARTS

36393	Board assembly, CPU	\$495.00
36584	Board assembly, power supply/display	560.00
19623	Overlay, membrane switch	60.00
16473	250 mA fuse, 115 VAC	4.00
16474	125 mA fuse, 230 VAC	6.00

I/O RELAY MODULES SOLD SEPARATELY:

15969	G4IDC5 10-32 VDC Input relay module, white (N/O)	30.00
15970	G40DC5R Dry contact 100 VDC/1.5 A output, red (N/O)	35.00
22848	G40DC5R5 Dry contact 100 VDC/1.5 A output, red (N/C)	28.00
15971	G40AC5 115 VAC Output relay module, black (N/O)	28.00
15972	G4IAC5 115 VAC Input relay module, yellow (N/O)	30.00
22847	G40AC5A5 115/230 VAC Output relay module, black (N/C)	28.00
36632	G40AC5A 115/230 VAC Output relay module, black (N/O)	28.00
36631	G4IAC5A 230 VAC Input relay module, yellow (N/O)	28.00
16478	Quencharc arc suppressor	11.00

NOTE: Because A-B Remote I/O and Profibus DP interface with programs written by non-RLWS parties, please consult factory for latest technical updates before quoting.

SURVIVOR® 320HE & 390HE INDICATORS

- NEMA 4X Fiberglass-Reinforced Polyester (FRP) enclosure
- (320HE) Bright, bold backlit 2" (50mm) Liquid Crystal Display (LCD)
- (390HE) Bright, bold 1" (25mm) Liquid Crystal Display (LCD)
- Universal mounting tabs (replaceable)
- 50 updates/second, typical (320HE)
- 30, 15, 7 1/2, 3 3/4 updates/second (390HE)
- Selectable display update rate
- lb/kg switching
- 5-button operation
- Selectable units
- One communication port, simplex, selectable RS-232 or 20 mA current loop
- RATTLETRAP® vibration control



320HE



390HE



Measurement
Canada
Approved

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
--------	-------------	------------------	----------------------

35826	SURVIVOR 320HE 115 VAC	18 lb	\$1,795.00
35827	SURVIVOR 320HE 230 VAC	18 lb	1,795.00
53517	SURVIVOR 390HE 115 VAC	17 lb	795.00

OPTIONS/ACCESSORIES

30911	Additional mounting tabs (set of 4)	25.00
-------	-------------------------------------	-------

PRIMARY COMPONENT PARTS

320HE			
66853	Board assembly, CPU	595.00	
23043	Board, AC power supply	350.00	
35284	Board display, 2" LCD	695.00	
390HE			
49954	Board assembly, CPU/display	395.00	
53543	AC power supply	115.00	

SURVIVOR® CW-80 INDICATOR

- Large, bold 0.8" (20.3mm) Light Emitting Diode (LED) rapid-response display
- Industrial-quality 304 stainless steel construction
- NEMA 4X/IP66 indicator enclosure
- Tough-Touch™ industrial touch-control front panel with keys for over, under, tare, zero, units, print, target and ID
- Front-panel "Independent Key Disabling" for: OVER, UNDER, TARE, PRINT and UNITS keys
- Displays units in decimal lb, kg, oz, lb & oz, grams
- Annunciator lights for unit selection
- High-intensity LED for Over, Under and Accept
- Storage for up to 300 tare and tolerance settings
- Automatic zero tracking
- 115 VAC or 230 VAC operation
- Bidirectional RS-232 and/or simplex 20 mA current loop communication
- RATTLETRAP® advanced digital filtering
- Combination desk/wall mount bracket
- Power for up to four 350-ohm load cells



Measurement
Canada
Approved

PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
35974	CW-80 Indicator, 115 VAC	10 lb	\$795.00
35975	CW-80 Indicator, 115 VAC w/TTL outputs	10 lb	895.00
35976	CW-80 Indicator, 115 VAC w/N/O relays	10 lb	935.00
35977	CW-80 Indicator, 115 VAC w/N/C relays	10 lb	935.00
35978	CW-80 Indicator, 115 VAC w/BBU & TTL outputs	10 lb	1,095.00
35979	CW-80 Indicator, 115 VAC w/BBU & N/O relays	10 lb	1,145.00
35980	CW-80 Indicator, 115 VAC w/BBU & N/C relays	10 lb	1,145.00
35981	CW-80 Indicator, 230 VAC	10 lb	795.00
35982	CW-80 Indicator, 230 VAC w/TTL outputs	10 lb	895.00
35983	CW-80 Indicator, 230 VAC w/N/O relays	10 lb	935.00
35984	CW-80 Indicator, 230 VAC w/N/C relays	10 lb	935.00
35985	CW-80 Indicator, 230 VAC w/BBU & TTL outputs	10 lb	1,095.00
35986	CW-80 Indicator, 230 VAC w/BBU & N/O relays	10 lb	1,145.00
35987	CW-80 Indicator, 230 VAC w/BBU & N/C relays	10 lb	1,145.00
OPTIONS/ACCESSORIES			
32388	6 VDC replacement battery		200.00
32147	Remote battery charger assembly, 6 VDC, 0.6A w/24" cable		135.00
32291	Additional operating manual		15.00
SOFTWARE			
32162	RS-485 communication		185.00
HARDWARE			
30205	12" indicator column		100.00
30206	18" indicator column		100.00
30207	24" indicator column		120.00
30208	30" indicator column		140.00

Indicators/Remote Displays

RD-300 REMOTE DISPLAY

- NEMA 4X Fiberglass-Reinforced Polyester (FRP) wall mount enclosure
- Easily-readable 1" (25.4 mm) Liquid Crystal Display (LCD)
- Optional NEMA 4X stainless steel wall-mount enclosure
- Optional display with backlight for dark conditions
- 115 VAC, 230 VAC available



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
22530	RD-300 AC, FRP enclosure	5 lb	\$695.00
22531	RD-300 DC, FRP enclosure	5 lb	695.00
22532	RD-300 AC, FRP enclosure w/backlight	5 lb	795.00
22533	RD-300 DC, FRP enclosure w/backlight	5 lb	795.00
22534	RD-300 AC, stainless steel enclosure	8 lb	795.00
22535	RD-300 DC, stainless steel enclosure	8 lb	795.00
22536	RD-300 AC, stainless steel enclosure w/backlight	8 lb	895.00
22537	RD-300 DC, stainless steel enclosure w/backlight	8 lb	895.00
22540	RD-300 AC, panel mount w/backlight	3 lb	695.00
22541	RD-300 DC, panel mount w/backlight	3 lb	695.00
34749	RD-300 AC, 230 VAC, FRP enclosure	5 lb	895.00
34750	RD-300 AC, 230 VAC, FRP enclosure w/backlight	5 lb	995.00

Specify interfacing indicator when ordering a remote display

OPTIONS/ACCESSORIES

32724	RD-300 AC/DC, board only	495.00
32725	RD-300 AC/DC, board only w/backlight	595.00
33210	Additional operating manual (RD-300/RD-232)	35.00

RD-232 REMOTE DISPLAY

- NEMA 4X Fiberglass-Reinforced Polyester (FRP) wall-mount enclosure
- Easy-to-read 6-digit 0.8" (20.3mm) Light Emitting Diode (LED) display
- AC or DC operation
- 4 status annunciators
- Full floating decimal point
- RS-232 or 20 mA current loop active or passive interface
- Optional NEMA 4X stainless steel wall-mount enclosure or NEMA 12 panel-mount version
- Compatible with a variety of digital weighing indicators; DIP switch selectable intuitive data receiver interprets serial strings



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
32716	RD-232, 115 VAC/12 VDC, FRP enclosure	5 lb	\$745.00
32717	RD-232, 115 VAC/12 VDC, stainless steel enclosure	8 lb	845.00
32727	RD-232, 115 VAC/12 VDC, panel mount	3 lb	645.00
34748	RD-232, 230 VAC/12 VDC, FRP enclosure	5 lb	795.00

Specify interfacing indicator when ordering a remote display

OPTIONS/ACCESSORIES

33210	Additional operating manual (RD-300/RD-232)	35.00
-------	---	-------

SURVIVOR® IQ F-SERIES FLIP DIGIT SMART REMOTE DISPLAYS

- AutoLink™
- 6 highly-visible yellow display digits
- Fixed decimal point
- Annunciators for gross, net, lb, and kg
- Durable NEMA 4 enclosure
- RS-232, 20 mA current loop
- Weigh mode selection
- Auto sensing 115 VAC/230 VAC



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
43598	SURVIVOR IQ F15, 1.5" display	15 lb	\$995.00
40879	SURVIVOR IQ F40, 4.0" display	45 lb	1,495.00
40880	SURVIVOR IQ F60, 6.0" display	70 lb	1,950.00
OPTIONS/ACCESSORIES			
43522	Time		110.00
43412	Temperature		115.00
65341	Time and temperature		195.00
43599	1.5" backlight, 115 VAC, can be set to 230 VAC		195.00
40881	4.0" backlight, 115 VAC, can be set to 230 VAC		245.00
43520	6.0" backlight, 115 VAC, can be set to 230 VAC		295.00
41248	4" visor		85.00
41247	6" visor		120.00
43545	Additional operating manual		35.00

SURVIVOR® IQ L-SERIES LCD REMOTE DISPLAYS

- Large easy to read 44 segment Liquid Crystal Display (LCD)
- AutoLink™
- Floating decimal point
- Annunciators for gross, net, lb and kg
- Serial output port
- Durable NEMA 4 enclosure
- Displays time and temperature
- Weigh mode selection
- Fluorescent backlighting



PART #	DESCRIPTION	EST. SHIP WEIGHT	SUGGESTED LIST PRICE
43983	SURVIVOR IQ L20, 115 VAC, 2.0" display	21 lb	\$1,195.00
46338	SURVIVOR IQ L20, 230 VAC, 2.0" display	21 lb	1,295.00
43982	SURVIVOR IQ L30, 115 VAC, 3.0" display	39 lb	1,495.00
46339	SURVIVOR IQ L30, 230 VAC, 3.0" display	39 lb	1,595.00
OPTIONS/ACCESSORIES			
43522	Time		110.00
43412	Temperature		115.00
65341	Time and temperature		195.00
52218	Visor, L30 display		85.00
43546	Additional operating manual		35.00