




RL1260 Single Point, Aluminum NTEP 1:5000 Class III Single Cell, IP65

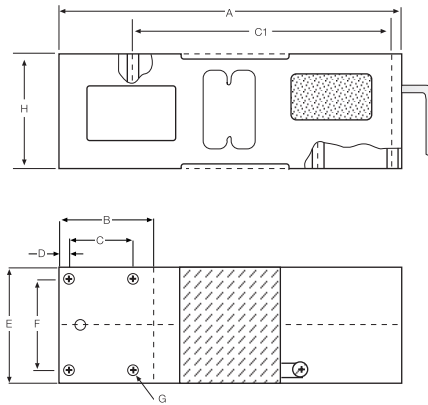

RATED CAPACITY	DIMENSIONS								
	A	B	C	C1	D	E	F	G	H
kg/millimeters									
50-635	188	52	35	14.2	5.5	63.3	50	5/16-18 UNC-2B	62.3
lb/inches									
110.2-1400.2	7.40	2.05	1.38	5.59	.22	2.49	1.97	5/16-18 UNC-2B	2.45

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Anodized aluminum
 Temperature: Compensated temperature range
 14°F to 122°F/-10°C to 50°C
 Safe Overload: 200% of full scale at center loading point
 Rated Excitation: 10V DC (20V maximum)
 Total Error: 0.02% Full scale
 Insulation Resistance: 5000 megohms

Seal Type: Environmentally protected, IP65
 Cable Length: 10'/3.1m
 Cable Color Code: Green ... + Excitation
 Black - Excitation
 Blue + Sense
 Brown ... - Sense
 Red + Signal
 White - Signal
 Warranty: 2 years

RL1260 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
50 kg (110.2 lb)	41020	\$310.00
75 kg (165.4 lb)	41021	\$310.00
100 kg (220.5 lb)	41022	\$310.00
200 kg (440.9 lb)	41023	\$310.00
250 kg (551.2 lb)	41024	\$310.00
300 kg (661.4 lb)	41025	\$310.00
500 kg (1102.3 lb)	41026	\$310.00
635 kg (1400 lb)	41027	\$310.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Tedea-Huntleigh	(see page 321) 1260