




RL1380 Single Point, Stainless Steel

NTEP 1:3000 Class III Single Cell, IP65

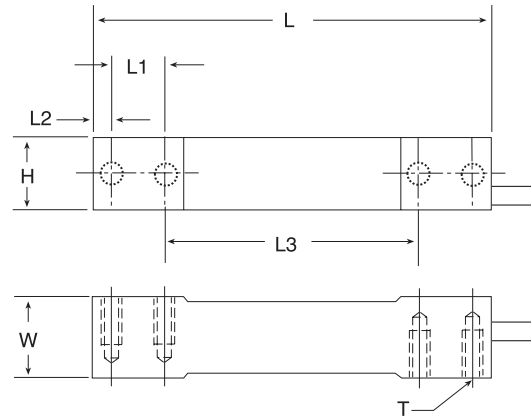

RATED CAPACITY	H	L	L1	DIMENSIONS L2	L3	T	W
kg/millimeters							
7-15	19.1	139.7	19.1	6.4	88.9	1/4-20 X 19.1 DP	30.2
30-60	23.9	139.7	19.1	6.4	88.9	1/4-20 X 19.1 DP	30.2
lb/inches							
15.4-33.1	.75	5.50	.75	.25	3.50	1/4-20 X .75 DP	1.19
66.1-132.3	.94	5.50	.75	.25	3.50	1/4-20 X .75 DP	1.19

SPECIFICATIONS

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms
 Material/Finish: Stainless steel
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Safe Overload: 150% Full scale
 Rated Excitation: 10V AC/DC (15V maximum)
 Combined Error: 0.03% Full scale

Insulation Resistance: 1000 megohms
 Seal Type: Environmentally protected, IP65
 Cable Length: 10'/3.1m
 Cable Color Code: Green + Excitation
 Black - Excitation
 White + Signal
 Red - Signal
 Yellow Shield
 Warranty: 2 years

RL1380 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
7 kg (15.4 lb)	30783	\$295.00
10 kg (22.0 lb)	30782	\$295.00
15 kg (33.1 lb)	30781	\$295.00
30 kg (66.1 lb)	30780	\$295.00
60 kg (132.3 lb)	30779	\$295.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
HBM	(see page 225) PWS