


RL1385 Single-Point, Stainless Steel NTEP 1:3000 Class III Single Cell, IP65

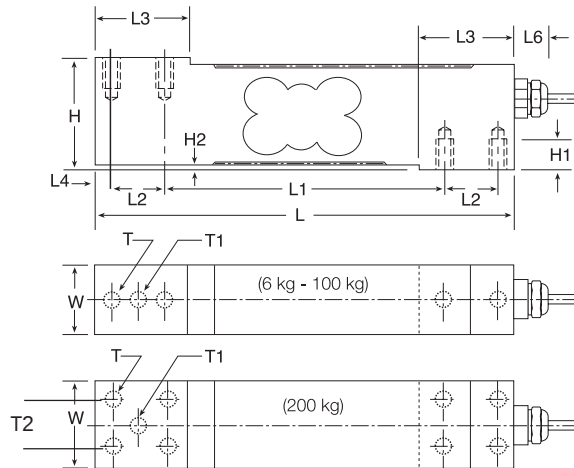

RATED CAPACITY	DIMENSIONS													
	H	H1	H2	L	L1	L2	L3	L4	L5	L6	W	T	T2	T1
kg/millimeters														
6-100	40.0	10.0	1.5	150.0	100.0	19.0	32.0	6.0	15.5	20.0	25.4	1/4-20 X 19.1 DP	N/A	47.8
200	40.0	10.0	1.5	150.0	100.0	19.0	32.0	6.0	15.5	20.0	38.1	1/4-20 X 19.1 DP	25.4	47.8
lb/inches														
13.2-220.5	1.57	.40	.06	5.90	3.93	.75	1.26	.24	.61	.79	1.00	1/4-20 X .75 DP	N/A	1.19
441.0	1.57	.40	.06	5.90	3.93	.75	1.26	.24	.61	.79	1.50	1/4-20 X .75 DP	1.00	1.19

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Seal Type:	Environmentally protected, IP65
Material/Finish:	Stainless steel	Cable Length:	10'/3.1m
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green ... + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	200% Full scale	Warranty:	2 years
Rated Excitation:	5V AC/DC (15V maximum)		
Combined Error:	0.02% Full scale		

RL1385 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
6 kg (13.2 lb)	41232	\$295.00
10 kg (22.0 lb)	41405	\$295.00
15 kg (33.1 lb)	41233	\$295.00
30 kg (66.1 lb)	41234	\$295.00
50 kg (110.2 lb)	41235	\$295.00
75 kg (165.4 lb)	41236	\$295.00
100 kg (220.5 lb)	41237	\$295.00
200 kg (441.0 lb)	41406	\$440.00