




RL1521A Single Point, Aluminum NTEP 1:5000 Class III Single Cell

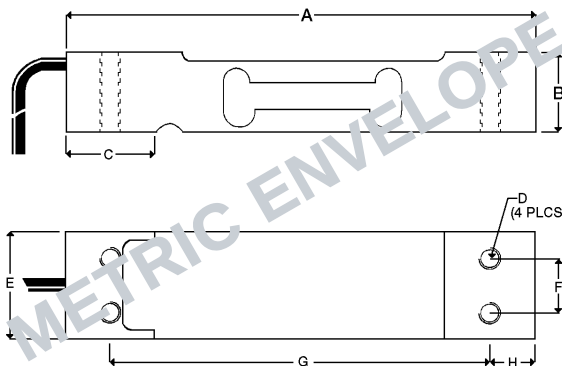

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	H
kg/millimeters								
3-7	130.0	22.0	25.0	M6 x 1.0	25.4	15.0	106.0	12.0
10-30	130.0	22.0	25.0	M6 x 1.0	30.0	15.0	106.0	12.0
35	130.0	22.0	25.0	M6 x 1.0	40.0	15.0	106.0	12.0
lb/inches								
6.6-15.4	5.12	.87	.99	M6 x 1.0	1.00	.59	4.17	.47
22.0-66.2	5.12	.87	.99	M6 x 1.0	1.18	.59	4.17	.47
77.2	5.12	.87	.99	M6 x 1.0	1.57	.59	4.17	.47

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohm
Material/Finish:	Aluminum
Temperature:	Compensated range -10°C to 40°C/14°F to 104°F
Safe Overload:	150% Full scale
Rated Excitation:	10V AC/DC (15V maximum)
Total Error:	0.03% Full scale

Insulation Resistance:	2000 megohms
Seal Type:	Environmentally protected
Cable Length:	450mm/17.8"
Cable Color Code:	Green + Excitation Black - Excitation Blue + Sense Brown - Sense Red + Signal White - Signal

Warranty: 2 year

RL1521A ORDER INFORMATION5

Load Rating	Part #	Suggested List Price
3 kg (6.6 lb)	50620	\$140.00
5kg (11 lb)	50619	\$140.00
7kg (15.4 lb)	50621	\$140.00
10 kg (22.1 lb)	50622	\$140.00
15 kg (33.1 lb)	50623	\$140.00
20 kg (44.1 lb)	50624	\$140.00
30 kg (66.1 lb)	50625	\$140.00
35kg (110.2 lb)	50626	\$140.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Celtron	(see page 186) LPS
BLH®	C2G1
Fairbanks®	4900 Series Checkweighers
NMB®	C2G1
Tedea-Huntleigh	(see page 312) 1022

Fairbanks is a registered trademark of Fairbanks Scales
NMB is a registered trademark of NMB Technologies Inc.
BLH is a registered trademark of BLH Electronics.