
**RICE LAKE WEIGHING SYSTEMS**

Industrial Solutions on a Global Scale®

RL50500 Single-Ended Beam, Stainless Steel, IP67

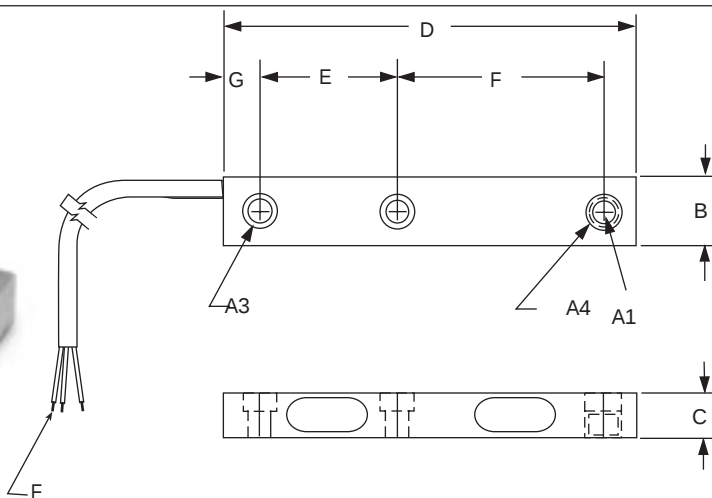

RATED CAPACITY	DIMENSIONS									
	A1	A2	A3	A4	B	C	D	E	F	G
lb/inches										
500	3/8-16 Thd. Thru	.20	.26 DIA.	.39 DIA.	.73	.49	4.50	1.50	2.25	.40
kg/millimeters										
226.8	3/8-16 Thd. Thru	5.1	6.6 DIA.	9.9 DIA.	18.5	12.4	114.3	38.1	57.2	10.2

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
0°F to 150°F/-18°C to 65°C
Safe Overload: 150% Full scale
Rated Excitation: 15V AC/DC
Nonlinearity: 0.02% Full scale
Hysteresis: 0.03% Full scale

Insulation Resistance: >2000 megohms
Seal Type: Environmentally protected, IP67
Cable Length: 15'/4.6m
Cable Color Code: Red + Excitation
Black - Excitation
Green + Signal
White - Signal
Orange ... Shield
Warranty: 2 years

RL50500 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
500 lb (226.8 kg)	33300	\$530.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Electroscale	017116-001