





RL75000SS Single-Ended Beam, Stainless Steel, IP67



5000 lb model shown

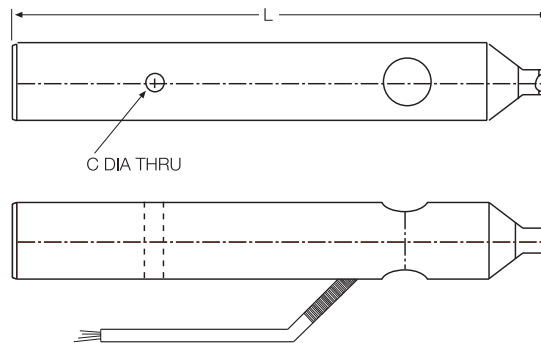

RATED CAPACITY

lb/inches

1250
2500
5000
10,000
25,000-37,500

C

.312
.375
.375
.50
.50

D

1.25
1.62
2.00
2.50
3.50

DIMENSIONS

F

.63
.70
.88
.88
1.75

L

11.50
11.50
10.88
12.63
15.00

T

#8-32
#6-32
#8-32
#8-32
5/16-18

kg/millimeters

567.0
1134.0
2268.0
4535.9
11,339.8-17,009.7

7.9
9.5
9.5
12.7
12.7

31.7
41.1
50.8
63.5
88.9

16.0
17.7
22.3
22.3
44.4

292.1
292.1
276.3
320.8
381.0

#8-32
#6-32
#8-32
#8-32
5/16-18

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V (3.0 mV/V (37,500lb))
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
0°F to 150°F/18°C to 65°C
Safe Overload: 150% Full scale
Rated Excitation: 15V DC
Nonlinearity: 0.02% Full scale

Hysteresis: 0.03% Full scale
Seal Type: Environmentally protected, IP67
Cable Length: 20'/6.1m
Cable Color Code: Green ... + Excitation
Black - Excitation
White + Signal
Red - Signal
Orange ... Shield
Warranty: 2 years

RL75000 SS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1250 lb (567 kg)	42501	\$495.00
2500 lb (1134 kg)	42502	\$495.00
5000 lb (2268 kg)	42503	\$550.00
10,000 lb (4536 kg)	42504	\$595.00
25,000 lb (11,340 kg)	42505	\$885.00
37,500 lb (17,010 kg)	47950	\$885.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Weigh-Tronix®	Weigh Bar

Weigh-Tronix is a registered trademark of Weigh-Tronix, Inc.

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171

Prices & Specifications subject to change without notice