




RICE LAKE WEIGHING SYSTEMS

Industrial Solutions on a Global Scale®

RL800WT Single Point, Stainless Steel, IP67

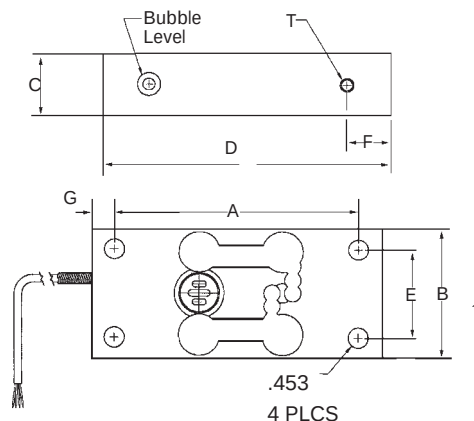

RATED CAPACITY	DIMENSIONS						
	A	B	C	D	E	F	T
lb/inches							
25-50	5.50	2.90	.735	6.50	2.00	1.00	5/16-18UNC x .50 DP
100-200	5.50	2.90	1.460	6.50	2.00	1.00	5/16-18UNC x .50 DP
kg/millimeters							
11.3-22.7	165.1	73.6	18.7	139.7	50.8	11.5	_____
45.4-90.7	165.1	73.6	37.1	139.7	50.8	11.5	_____

SPECIFICATIONS:

Full Scale Output: 1.0 mV/V
Bridge Resistance: 350 ohm
Material/Finish: Stainless Steel
Temperature: Compensated range
-40°F to 180°F/-40°C-82°C
Safe Overload: 200% Full scale
Rated Excitation: 10V DC (15V maximum)
Total Error: 0.02% Full scale

Hysteresis: 0.02% Full scale
Insulation Resistance: 5000 megohms
Seal Type: Environmentally protected, IP67
Cable Length: 10'/3.1m
Cable Color Code: Green ... + Excitation
Black - Excitation
White + Signal
Red - Signal
Orange ... Shield
Warranty: 2 years

RL800WT ORDER INFORMATION

Load Rating	Part #	Suggested List Price
25 lb (11.3 kg)	53295	\$695.00
50 lb (22.7 kg)	53296	\$695.00
100 lb (45.4kg)	53297	\$695.00
200 lb (90.7 kg)	53298	\$695.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Weightronix	FLS