



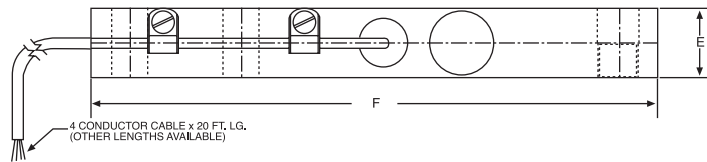

RLBLF Single-Ended Beam, Stainless Steel, IP67

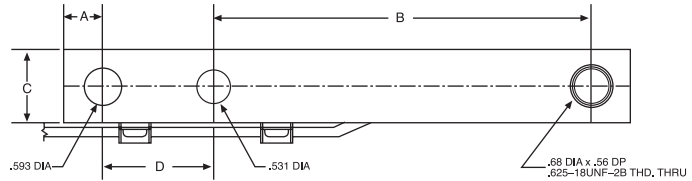

RATED CAPACITY	DIMENSIONS					
	A	B	C	D	E	F
lb/inches						
1500-2500	.63	6.00	1.19	1.75	1.13	9.00
kg/millimeters						
680.4-1134.0	16.0	152.4	30.2	44.4	28.7	228.6

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Stainless steel
 Temperature: Compensated range
 -40°F to 180°F/-40°C to 82°C
 Safe Overload: 150% Full scale
 Rated Excitation: 10V DC (15V maximum)
 Nonlinearity: 0.03% Full scale

Hysteresis: 0.05% Full scale
 Insulation Resistance: 5000 megohms
 Seal Type: Environmentally protected, IP67
 Cable Length: 20'
 Cable Color Code: Green ... + Excitation
 Black - Excitation
 White + Signal
 Red - Signal
 Orange ... Shield
 Warranty: 2 years

RLBLF SS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1500 lb (680.4 kg)	53285	\$535.00
2500 lb (1134 kg)	53286	\$535.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Fairbanks®	3-53581-X, 3-52921-1

Fairbanks is a registered trademark of Fairbanks, Inc.