




RLETB Single-Ended Beam, Alloy Steel

Environmentally Protected, OIML C3, IP67

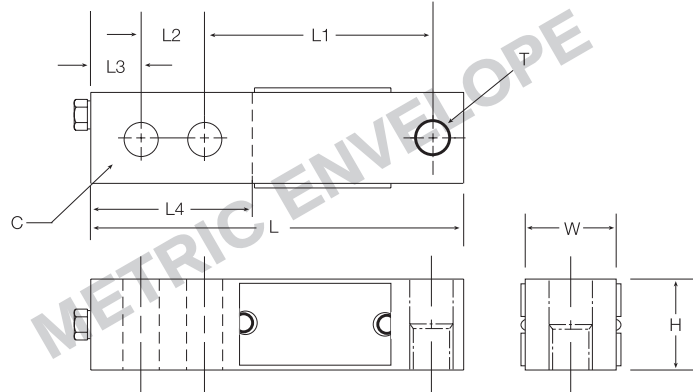

RATED CAPACITY	DIMENSIONS								
	C	H	L	L1	L2	L3	L4	W	T
kg/millimeters									
500-2000	57.0	32.0	130.0	76.0	25.0	16.0	13.0	32.0	M12 x 1.75-6H
5000	76.0	38.0	171.0	95.0	38.0	19.0	20.7	38.0	M20 x 1.5-6H
lb/inches									
1102.3-4409.2	2.25	1.25	5.12	3.00	.98	.63	.51	1.25	M12 x 1.75-6H
11,023.1	3.00	1.50	6.73	3.74	1.50	.75	.81	3.75	M20 x 1.5-6H

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Alloy steel
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Safe Overload: 150% Full scale
 Rated Excitation: 10V AC/DC (15V maximum)
 Combined Error: 0.03% Full scale

Insulation Resistance: 5000 megohms
 Seal Type: Environmentally protected, IP67
 Cable Length: 6m/19.7'
 Cable Color Code: Red + Excitation
 Black - Excitation
 Green + Signal
 White - Signal
 Warranty: 2 years

RLETB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
500 kg (1102.5 lb)	31249	\$325.00
1000 kg (2205.0 lb)	31248	\$325.00
2000 kg (4410.0 lb)	31247	\$325.00
5000 kg (11,025.0 lb)	31246	\$405.00