
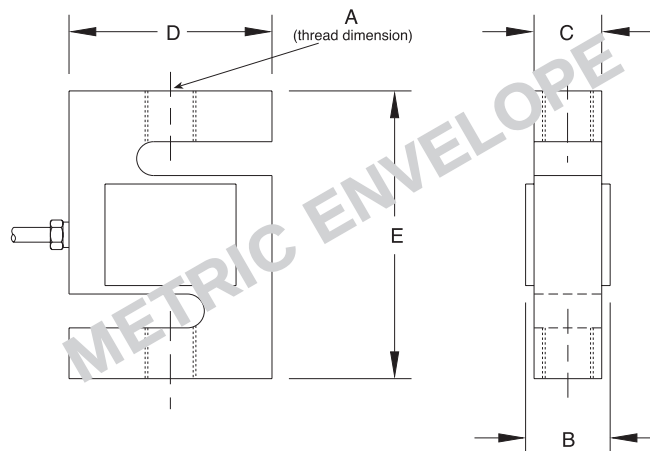


RLETS S-Beam, Alloy Steel, Environmentally Protected, OIML C3, IP67

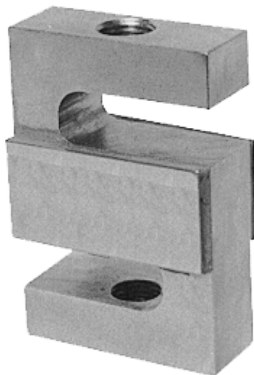

RATED CAPACITY

kg/millimeters
250-1000
2500

A
M12 x 1.75-6H
M20 x 1.5-6H

DIMENSIONS

B
25.4
31.8

C
19.1
25.4

D
50.8
76.2

E
76.0
108.0

lb/inches

551.2-2205.0
5512.5

M12 x 1.75-6H
M20 x 1.5-6H

1.00
1.25

.75
1.00

2.00
3.00

3.00
4.25

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V $\pm$ 0.25%
Bridge Resistance: 350 ohms, nominal
Material/Finish: Alloy steel
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Seal Type: Environmentally protected, IP67
Safe Overload: 150% Full scale
Rated Excitation: 10V AC/DC (15V maximum)
Combined Error: 0.02% Full scale

Insulation Resistance: 5000 megohms
Cable Length: 6m/19.7'
Cable Color Code: Red + Excitation
Black - Excitation
Green ... + Signal
White - Signal
Warranty: 2 years

RLETS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
250 kg (551.2 lb)	31254	\$295.00
500 kg (1102.3 lb)	31255	\$295.00
1000 kg (2205.0 lb)	31256	\$295.00
2500 kg (5512.5 lb)	31257	\$460.00