



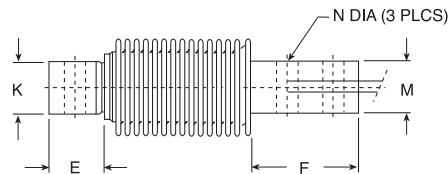

RLHBB Single-Ended Beam, Stainless Steel

Hermetically Sealed, IP68, NTEP 1:5000 Class III Multiple Cell, OIML C3

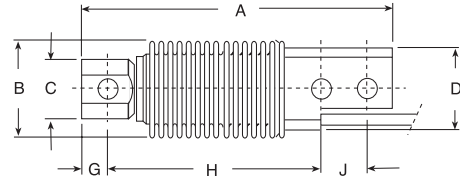

RATED CAPACITY	DIMENSIONS											
	A	B	C	D	E	F	G	H	J	K	M	N
kg/millimeters												
5-500	120.0	40.0	23.0	32.0	20.5	45.5	10.0	82.0	18.0	20.0	20.0	8.20
lb/inches												
11.0-1102.3	4.72	1.61	.91	1.26	.81	1.79	.39	3.23	.71	.79	.79	.32

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Stainless steel
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Safe Overload: 150% Full scale
 Rated Excitation: 10V AC/DC (15V maximum)
 Total Error: 0.02% Full scale
 Insulation Resistance: 1000 megohms

Deflection at Capacity: 5-250 kg ≤ .4mm/.015"
 Seal Type: Hermetically sealed, IP68
 Cable Length: 3m/10'
 Cable Color Code: Blue + Excitation
 Black - Excitation
 White + Signal
 Red - Signal
 Green ... + Sense
 Gray - Sense
 Warranty: 2 years

RLHBB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
OIML		
5 kg (11.0 lb)	32678	\$525.00
10 kg (22.0 lb)	32677	\$525.00
20 kg (44.1 lb)	31259	\$525.00
50 kg (110.2 lb)	31260	\$525.00
100 kg (220.5 lb)	31261	\$525.00
200 kg (441.0 lb)	31262	\$525.00
250 kg (551.2 lb)	31263	\$525.00
500 kg (1102.5 lb)	36462	\$525.00
NTEP		
5 kg (11.0 lb)	41113	\$525.00
10 kg (22.0 lb)	41114	\$525.00
20 kg (44.1 lb)	41115	\$525.00
50 kg (110.2 lb)	41116	\$525.00
100 kg (220.5 lb)	41117	\$525.00
200 kg (441.0 lb)	41118	\$525.00
250 kg (551.2 lb)	41119	\$525.00
500 kg (1102.5 lb)	41120	\$525.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
HBM	(see page 222) Z6
Revere Transducers	(see page 244) SHB
Tedea-Huntleigh	(see page 310) 355

WEIGH MODULE AVAILABLE

Model	Page #
1700HE Series	16