



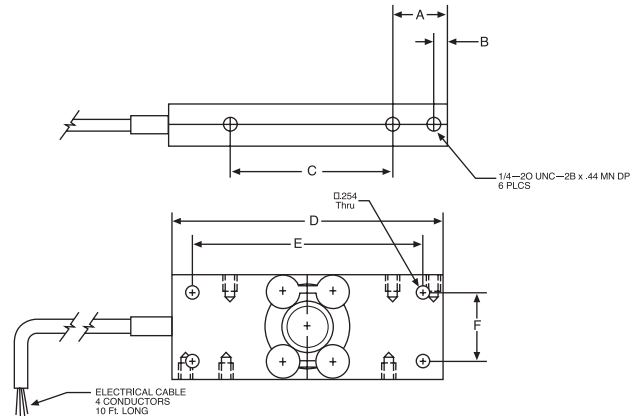

RLHPS Single Point, Stainless Steel

Hermetically Sealed, IP68

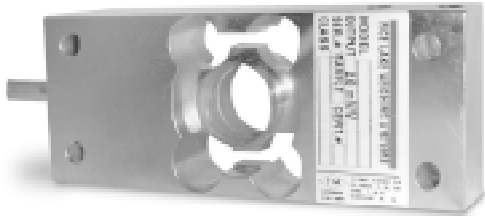

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	H
kg/millimeters								
6.0-15	25.4	6.35	76.2	127.0	108.0	31.75	4.25	50.8
lb/inches								
13.2-33.1	5.00	4.25	3.00	1.25	.73	1.00	.25	1.98

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Stainless Steel
 Temperature: Compensated range
 -40°F to 180°F/-40°-82°C
 Safe Overload: 150% Full scale
 Rated Excitation: 10V DC/AC (15V maximum)
 Linearity: .015% Full scale
 Hysteresis: 0.15 % Full scale

Insulation Resistance: 5000 megohms
 Deflection at Capacity: 3-90 kg ≤ .4mm/.015"
 Seal Type: Hermetically sealed, IP68
 Cable Length: 10'/3.1m
 Cable Color Code: Green ... + Excitation
 Black - Excitation
 White + Signal
 Red - Signal
 Platform Size: 14 x 14
 Warranty: 2 years

RLHPS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
6 kg (13.2 lb)	53282	\$650.00
15 kg (33.1 lb)	53281	\$650.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Revere-Transducer	(see page 263) HPS