




RLHSS Single-Ended Beam, Stainless Steel

Welded Seal, IP67, OIML C3

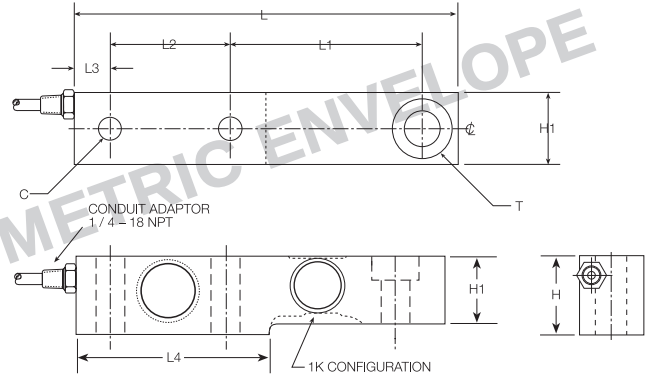

RATED CAPACITY	DIMENSIONS								
	C	H	H1	L	L1	L2	L3	L4	T
kg/millimeters									
500-2000	17.5	47.6	36.5	202.2	98.4	63.5	19.0	101.6	17.5 THRU C'BORE 30.2x11.9 DEEP
5000	25.4	16.0	47.6	234.9	123.9	66.8	20.6	117.3	25.4 THRU C'BORE 41.4x15.7 DEEP
lb/inches									
1102.3-4409.2	.69	1.87	1.44	7.96	3.87	2.50	.75	4.00	.69 THRU C'BORE 1.19x.47 DEEP
11,023.1	1.00	.63	1.87	9.25	4.88	2.63	.81	4.62	1.00 THRU C'BORE 1.63x.62 DEEP

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: Alloy steel
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Safe Overload: 150% Full scale
 Rated Excitation: 10V AC/DC (15V maximum)
 Combined Error: 0.03% Full scale

Insulation Resistance: 5000 megohms
 Seal Type: Welded seal, IP67
 Cable Length: 6m/19.7'
 Cable Color Code: Red + Excitation
 Black - Excitation
 Green + Signal
 White - Signal
 Warranty: 2 years

RLHSS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
500 kg (1102.5 lb)	31245	\$695.00
1000 kg (2205.0 lb)	31242	\$695.00
2000 kg (4410.0 lb)	31243	\$695.00
5000 kg (11,025.0 lb)	31244	\$795.00