




RLMK1 Single Point, Alloy Steel

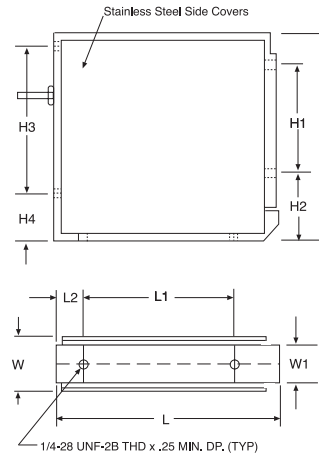

RATED CAPACITY

lb/inches
50-3000

kg/millimeters
22.7-1360.8

DIMENSIONS

	H	H1	H2	H3	H4	L	L1	L2	W	W1
lb/inches	5.3	2.75	1.72	3.74	1.22	5.9	4.00	.70	1.29	.89
kg/millimeters	134.6	69.9	43.7	95.0	31.0	149.9	101.6	17.8	32.8	22.6

SPECIFICATIONS:

Full Scale Output: 2.0 mV/ V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: High-alloy steel, nickel plated
 Temperature: Compensated range
 0°F to 150°F/-18°C to 65°C
 Safe Overload: 200% Full scale
 Rated Excitation: 10V AC/DC (15V maximum)
 Nonlinearity: 0.02% Full scale
 Hysteresis: 0.02% Full scale
 Insulation Resistance: 1000 megohms

Seal Type: Environmentally protected
 Cable Length: 25'/7.6m
 Cable Color Code: Red + Excitation
 Black - Excitation
 White + Signal
 Green - Signal
 Yellow .. + Sense
 Blue - Sense
 Orange ... Shield
 Warranty: 2 years

RLMK1 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
50 lb (22.7 kg)	26226	\$860.00
100 lb (45.3 kg)	26227	\$860.00
200 lb (90.7 kg)	26228	\$860.00
500 lb (226.8 kg)	26229	\$860.00
1000 lb (453.6 kg)	26230	\$860.00
2000 lb (907.2 kg)	26231	\$860.00
3000 lb (1360.8 kg)	26232	\$860.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
NCI/Weigh-Tronix®	Mark I