




RICE LAKE WEIGHING SYSTEMS

Industrial Solutions on a Global Scale®

RLMK4 Single Point, Alloy Steel/Stainless Steel

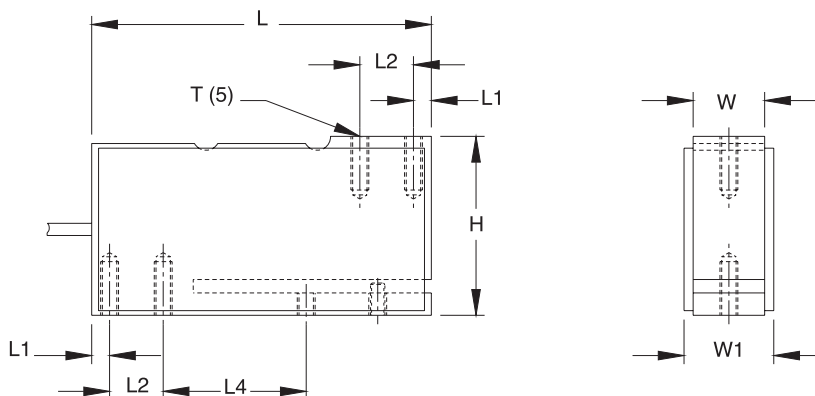

RATED CAPACITY	H	L	L1	L2	L4	T	W	W1
lb/inches								
10-100	2.50	4.75	.25	.75	2.00	1/4-20 X 0.50 DP	1.00	1.26
kg/millimeters								
4.5-45.3	63.5	120.7	6.4	19.1	0.08	1/4-20 X 12.7 DP	25.4	31.9

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	1000 megohms
Bridge Resistance:	350 ohms, nominal	Cable Length:	10'/3.1m
Material/Finish:	Alloy steel or Stainless steel	Cable Color Code:	Red + Excitation Black - Excitation White + Signal* Green - Signal* Orange ... Shield
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C	Warranty:	2 years
Safe Overload:	500% Full scale		*Cell is wired for negative reading
Rated Excitation:	0-15 VDC		
Total Error:	.03% Full scale		
Seal Type:	Environmentally protected		

RLMK4 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
Alloy steel:		
10 lb (4.5 kg)	17576	\$395.00
15 lb (6.8 kg)	17577	\$395.00
25 lb (11.3 kg)	17578	\$395.00
30 lb (13.6 kg)	17579	\$395.00
50 lb (22.7 kg)	17580	\$395.00
100 lb (45.3 kg)	17581	\$395.00
Stainless steel:		
10 lb (4.5 kg)	25375	\$445.00
15 lb (6.8 kg)	25376	\$445.00
25 lb (11.3 kg)	25377	\$445.00
30 lb (13.6 kg)	25378	\$445.00
50 lb (22.7 kg)	25379	\$445.00
100 lb (45.3 kg)	25380	\$445.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
NCI/Weigh-Tronix®	Mark IV

NCI and Weigh-Tronix are registered trademarks of Weigh-Tronix, Inc.

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171