





RLS2101 Tension Link, Stainless Steel

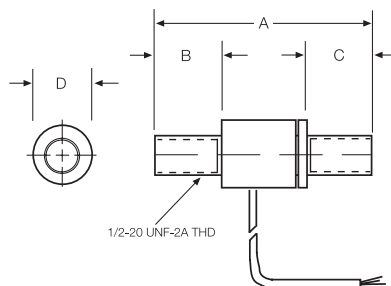

250-1000 lb/113.4-453.6 kg

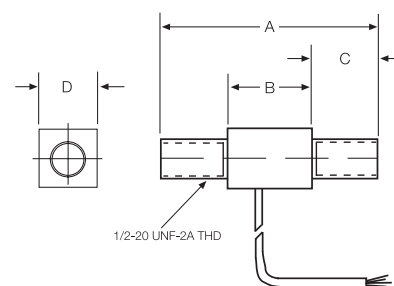

2000-5000 lb/907.2-2268.0 kg

RATED CAPACITY

lb/inches
250-1000
2000-5000

A

B

DIMENSIONS

C

D

kg/millimeters
113.4-453.6
907.2-2268.0

69.8
69.8

25.4
26.6

16.5
21.5

25.4
19.1

SPECIFICATIONS:

Full Scale Output: 1.5 mV/V nominal
Bridge Resistance: 1000 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
0°F to 150°F/18°C to 65°C
Safe Overload: 150% Full scale
Rated Excitation: 10V DC
Nonlinearity: 0.25% Full scale

Hysteresis: 0.10% Full scale
Seal Type: Environmentally protected
Cable Length: 18"/.45m
Cable Color Code: Green ... + Excitation
Black - Excitation
White + Signal
Red - Signal
Warranty: 1 year

RLS2101 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
250 lb (113.4 kg)	42538	\$395.00
500 lb (226.8 kg)	42539	\$395.00
1000 lb (453.6 kg)	42540	\$395.00
2000 lb (907.2 kg)	42541	\$395.00
3000 lb (1360.8 kg)	42542	\$395.00
4000 lb (1814.4 kg)	42543	\$395.00
5000 lb (2268.0 kg)	42544	\$395.00