




RLSB250 Single-Ended Beam, Stainless Steel Welded Seal, NTEP 1:5000 Class III Multiple Cell, IP67

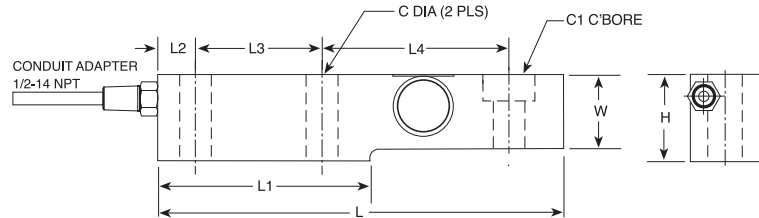

RATED CAPACITY	DIMENSIONS								
	C	C1	H	L	L1	L2	L3	L4	W
lb/inches									
2500	.53	.68 THRU C'BORE 1.19x.47DP	1.88	8.00	4.00	.75	2.50	3.88	1.44
kg/millimeters									
1134.0	13.5	.68 THRU C'BORE 1.19x.47DP	47.8	203.2	101.6	19.1	63.5	98.6	36.6

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Operating range 14°F to 104°F/-10°C to 40°C
Safe Overload:	150% Full scale
Rated Excitation:	10V DC (15V maximum)
Combined Error:	0.02%
Non-repeatability:	0.01% Full scale

Insulation Resistance:	5000 megohms
Seal Type:	Welded seal, IP67
Cable Length:	20'/6.2m
Cable Color Code:	Green ... + Excitation Black - Excitation White + Signal Red - Signal
Warranty:	2 years

RLSB250 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
2500 lb (1134.0 kg)	34482	\$595.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Cardinal®	SB2500

WEIGH MODULE AVAILABLE

Model	Page #
Mount Kit RL1900	42

Cardinal is a registered trademark of Cardinal Scale Manufacturing Co.