


RLSSB Single-Ended Beam, Stainless Steel Welded Seal, NTEP 1:5000 Class III Multiple Cell, IP67

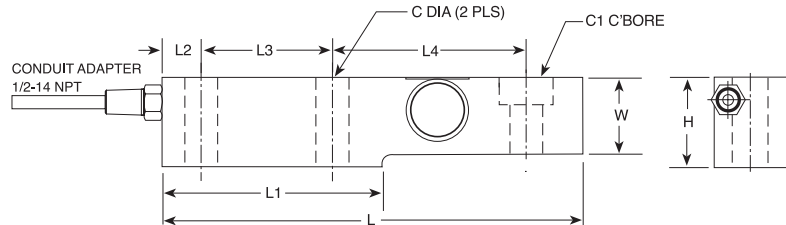

RATED CAPACITY	DIMENSIONS								
	C	C1	H	L	L1	L2	L3	L4	W
lb/inches									
1000-5000	.53	.68 THRU C'BORE 1.19x.47DP	1.88	8.00	4.00	.75	2.50	3.88	1.44
10,000	.88	1.00 THRU C'BORE 1.63x.62DP	2.75	9.25	4.62	.81	2.63	4.88	1.88
kg/millimeters									
453.6-2268.0	13.5	.68 THRU C'BORE 1.19x.47DP	47.8	203.2	101.6	19.1	63.5	98.6	36.6
4535.9	22.4	1.00 THRU C'BORE 1.63x.62DP	69.9	235.0	117.3	20.6	66.8	124.0	47.8

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Operating range 14°F to 104°F/-10°C to 40°C
Safe Overload:	150% Full scale
Rated Excitation:	10V DC (15V maximum)
Combined Error:	0.02%
Non-repeatability:	0.01% Full scale

Insulation Resistance:	5000 megohms
Seal Type:	Welded seal, IP67
Cable Length:	20'/6.1m
Cable Color Code:	Green ... + Excitation Black - Excitation White ... + Signal Red - Signal
Warranty:	2 years

RLSSB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1000 lb (453.6 kg)	34310	\$600.00
2000 lb (907.2 kg)	34311	\$600.00
5000 lb (2268.0 kg)	34312	\$600.00
10,000 lb (4535.9 kg)	34313	\$715.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
HBM	(see page 220) SB3
Revere Transducers	(see page 245) SSB
Artech	SS30610

WEIGH MODULE AVAILABLE

Model	Page #
Mount Kit RL1900	42

Teflon is a registered trademark of E.I. DuPont.