

Compression Canisters



C2P1, Alloy Steel Page 168

Single-column design with low deflection and trouble-free operation. High-alloy steel, epoxy coated for use in harsh environments. Compact and rugged. NTEP-certified capacities from 20,000 to 200,000 lb (9071.9 to 90,718.5 kg); non-NTEP capacity of 300,000 lb (136,078.1 kg). Integral 10' (3.1m) or 35' (10.7m) cable.



C3P1, Alloy Steel Page 169

Single-column, environmentally-protected design provides low deflection and trouble-free operation. High-alloy steel, epoxy coated for corrosion resistance. Compact and rugged. Capacities from 500 to 10,000 lb (226.8 to 4535.9 kg). Complete with 35' (10.7m) of load cell cable.



Tension Canisters



T2P1, Alloy Steel Page 170


Single-column, environmentally-protected design provides low deflection and trouble-free operation. High-alloy steel, epoxy-coated construction yields trouble-free performance in harsh environments. Designed for high-capacity tension applications. Capacities of 20,000 and 50,000 lb (9071.9 and 22,679.6 kg). Integral 35' (10.7m) cable.



T3P1, Alloy Steel Page 171


Single-column design provides low deflection and trouble-free operation. High-alloy steel, epoxy-coated construction yields trouble-free performance in harsh environments. Designed for high accuracy in light- to medium-capacity tension or compression applications. Capacities of 400 to 10,000 lb (226.87 to 3424.9 kg). Complete with 35' (10.7m) of load cell cable.





C2P1 Compression Canister, Alloy Steel

NTEP 1:4500 Class IIIL Multiple Cell, IP67

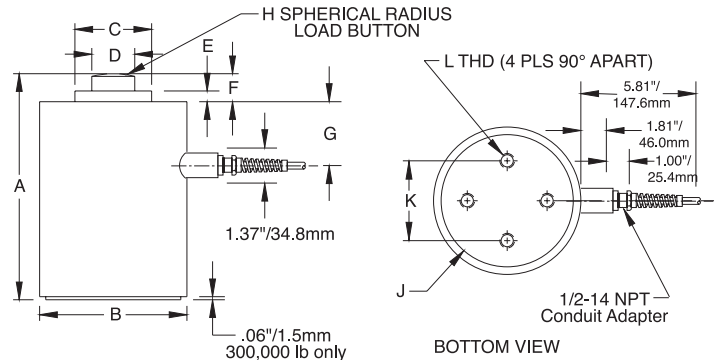

RATED CAPACITY	A	B	C	D	DIMENSIONS				J	K	L
lb/inches					E	F	G	H			
20,000-50,000	7.50	4.50	2.25	1.25	.50	.75	2.50	6.00	—	2.38	3/8-24 UNF-2 X 3/8 DP
100,000	9.13	6.00	3.13	1.75	.63	1.06	2.50	12.00	—	4.00	1/2-20 UNF-2B X 3/4 DP
200,000	11.63	8.00	4.50	2.50	.63	1.06	3.50	12.00	—	5.50	5/8-18 UNF-2B X 1 DP
300,000	14.00	10.00	5.00	3.00	.75	1.31	4.31	15.00	8.00	5.50	3/4-16 UNF-2B X 1 1/4 DP
kg/millimeters					E	F	G	H			
9071.9-22,679.6	190.5	114.3	57.2	31.8	12.7	19.1	63.5	152.4	—	60.3	3/8-24 UNF-2 X 3/8 DP
45,359.2	231.8	152.4	79.4	44.5	15.9	27.0	63.5	304.8	—	101.6	1/2-20 UNF-2B X 3/4 DP
90,718.5	295.3	203.2	114.3	63.5	15.9	27.0	88.9	304.8	—	139.7	5/8-18 UNF-2B X 1 DP
136,078.1	295.3	203.2	114.3	63.5	19.1	27.0	109.5	304.8	203.2	139.7	3/4-16 UNF-2B X 1 1/4 DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Deflection at Capacity:	20,000-30,000 lb = .0075"/.191mm, 50,000 = .0065"/.165mm, 100,000 lb = .0075"/.191mm, 200,000 lb = .0070"/.178mm, 300,000 lb = .012"/.305mm
Material/Finish:	High-alloy steel, epoxy coated	Cable Length:	10' or 35'/3.0m or 10.7m, See below
Temperature:	Compensated range 15°F to 115°F/-9°C to 46°C	Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Seal Type:	NEMA 6 environmentally protected	Warranty:	1 year
Safe Overload:	150% Full scale		
Rated Excitation:	10V DC (20V maximum)		
Nonlinearity:	0.03% Full scale		
Hysteresis:	0.02% Full scale		

C2P1 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
NTEP 1:4500, 10 ft Cables:		
20,000 lb (9071.9 kg)	21625	\$1,480.00
30,000 lb (13,607.8 kg)	21629	\$1,480.00
50,000 lb (22,679.6 kg)	21626	\$1,505.00
100,000 lb (45,359.2 kg)	21627	\$1,650.00
200,000 lb (90,718.5 kg)	21628	\$2,100.00
NTEP 1:4500, 35 ft Cables:		
20,000 lb (9071.9 kg)	21630	\$1,625.00
30,000 lb (13,607.8 kg)	21631	\$1,625.00
50,000 lb (22,679.6 kg)	21632	\$1,725.00
100,000 lb (45,359.2 kg)	21633	\$1,850.00
200,000 lb (90,718.5 kg)	21634	\$2,395.00


Non-NTEP, 10 ft Cables:		
300,000 lb (13,6078.1 kg)	17670	\$3,995.00
Non-NTEP, 35 ft Cables:		
300,000 lb (136,078.1 kg)	17671	\$4,095.00

Fairbanks is a registered trademark of Fairbanks Scales
Toledo is a registered trademark of Mettler-Toledo, Inc.


INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Fairbanks®	3-38065-X, 3-38066-X
HBM	C10
Streeter Richardson	2011611, 2011612
Streeter Richardson	2011613, 2011614, 2011617
Toledo®	10049200A, 10014900A
Toledo®	10011900A, 10049300A

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171



C3P1 Compression Canister, Alloy Steel IP67

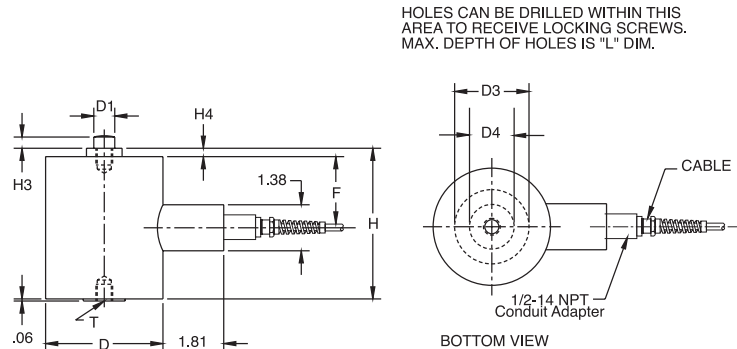


RATED CAPACITY	DIMENSIONS									
	D	D1	D3	D4	F	H	H3	H4	L	T
lb/inches										
500-3000	3.50	.62	1.25	—	2.25	4.56	.38	.25	—	1/2-20 UNF-2B X .50 DP
5000-10,000	3.50	1.06	2.50	1.75	2.66	5.94	.62	.38	.50	1-14 UNS-2B X 1.25 DP
kg/millimeters										
226.8-1360.8	88.9	15.7	31.8	—	57.2	115.8	9.5	6.4	—	1/2-20 UNF-2B X .50 DP
2268.0-4535.9	88.9	27.0	63.5	44.5	67.6	150.9	15.7	9.7	12.7	1-14 UNS-2B X 1.25 DP

SPECIFICATIONS


Full Scale Output:	3.0 mV/V	Deflection at Capacity:	500 lb = .007"/.18mm, 1000 lb = .006"/.15mm, 2000-3000 lb = .005"/.13mm, 5000 lb = .007"/.18mm, 10,000 lb = .005"/.13mm
Bridge Resistance:	350 ohms, nominal	Seal Type:	NEMA 6 environmentally protected
Material/Finish:	High-alloy steel, epoxy coated	Cable Length:	35'/10.7m
Temperature:	Compensated range 15°F to 115°F/-9°C to 46°C	Cable Color Code:	Green .. + Excitation Black - Excitation White ... + Signal Red - Signal Yellow ... Shield
Safe Overload:	150% Full scale	Warranty:	1 year
Rated Excitation:	10V DC (20V maximum)		
Nonlinearity:	0.05% Full scale		
Hysteresis:	500 lb = 0.05% Full scale 1000-10,000 lb = 0.02% Full scale		
Insulation Resistance:	5000 megohms		

C3P1 ORDER INFORMATION			
Load Rating	Part #	Suggested List Price	
500 lb (226.8 kg)	17672	\$1,805.00	
1000 lb (453.6 kg)	17673	\$1,805.00	
2000 lb (907.2 kg)	17674	\$1,805.00	
3000 lb (1360.8 kg)	17675	\$1,805.00	
5000 lb (2268.0 kg)	17676	\$1,895.00	
10,000 lb (4535.9 kg)	17677	\$1,895.00	

INTERCHANGEABLE PRODUCTS	
Manufacturer	Model
Fairbanks®	3-38054-X
Toledo®	1004400A, KN713700
Toledo®	KB200570, 10049100A



T2P1 Tension Canister, Alloy Steel

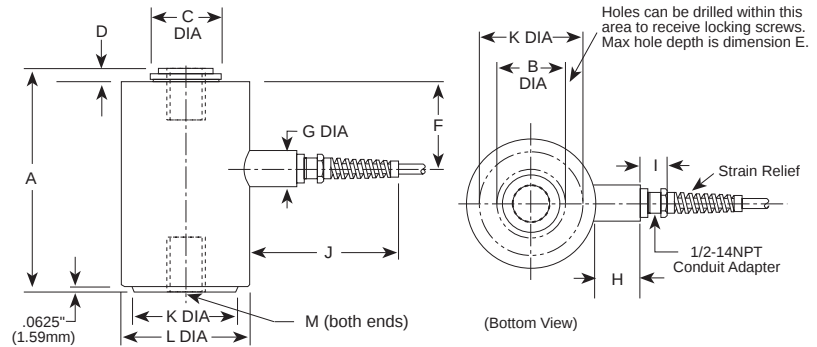

RATED CAPACITY	DIMENSIONS												
	A	B	C	D	E	F	G	H	I	J	K	L	M
lb/inches													
20,000	8.50	2.63	2.75	.50	1.00	3.38	1.38	1.81	1.00	5.81	4.00	5.00	1 1/2-12 UNF-2B x 2DP
50,000	11.44	3.75	4.00	.63	1.00	5.00	1.38	1.81	1.00	5.81	5.75	6.50	2-12UNF-2B x 2.63DP
kg/millimeters													
9071.9	215.9	66.8	69.9	12.7	25.4	85.9	35.1	46.0	25.4	147.6	101.6	127.0	1 1/2-12 UNF-2B x 50.8DP
22,679.7	290.6	95.3	101.6	16.0	25.4	127.0	35.1	46.0	25.4	147.6	146.1	165.1	2-12 UNF-2B x 66.7DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	High-alloy steel, epoxy coated
Temperature:	Compensated range 15°F to 115°F/-9°C to 46°C
Seal Type:	Environmentally protected
Safe Overload:	150% Full scale
Rated Excitation:	10V AC/DC (20V maximum)
Combined Error:	±0.03% Full scale
Repeatability:	0.02% Full scale


Insulation Resistance:	5000 megohms
Deflection at Capacity:	20,000 lb = .0075"/.191mm, 50,000 lb = .0100"/.254mm
Cable Length:	35'/10.7m
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Warranty:	1 year

T2P1 ORDER INFORMATION


Load Rating	Part #	Suggested List Price
20,000 lb (9071.9 kg)	17660	\$2,810.00
50,000 lb (22,679.6 kg)	17661	\$3,610.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Fairbanks®	657090, 657091
Streeter Richardson	2011711, 2011712



T3P1 Tension Canister, Alloy Steel

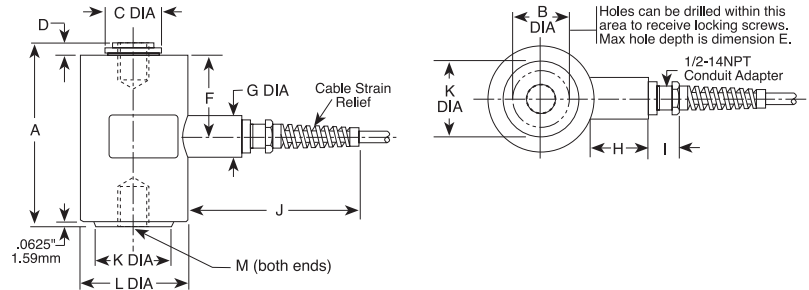

RATED CAPACITY	A	B	C	D	E	F	G	H	I	J	K	L	M
lb/inches													
500-3000	4.56	—	1.06	.25	—	2.25	1.38	1.81	1.00	5.81	1.25	3.50	1/2-20 UNF-2B x .5 DP
5000-10,000	5.93	1.75	1.87	.38	.50	2.66	1.38	1.81	1.00	5.81	2.50	3.50	1-14 UNS-2B x 1.25 DP
kg/millimeters													
226.8-1360.8	115.8	—	26.9	6.4	—	57.2	35.1	46.0	25.4	147.6	31.8	88.9	1/2-20 UNF-2B x 12.7DP
2268.0-4535.9	150.6	44.4	47.5	9.7	12.7	67.6	35.1	46.0	25.4	147.6	63.5	88.9	1-14 UNS-2B x 31.8DP

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Deflection at Capacity:	500 lb = .007"/.18mm, 1000 lb = .006"/.15mm, 2000-3000 lb = .005"/.13mm, 5000 lb = .007"/.18mm, 10,000 lb = .005"/.13mm
Material/Finish:	High-alloy steel, epoxy coated	Cable Length:	35'/10.7m
Temperature:	Compensated range 15°F to 115°F/-9°C to 46°C	Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Seal Type:	Environmentally protected	Warranty:	1 year
Safe Overload:	150% Full scale		
Rated Excitation:	10V AC/DC (20V maximum)		
Nonlinearity:	0.05% Full scale		
Hysteresis:	0.05% Full scale (500 lb) 0.02% Full scale (1000-10,000 lb)		

T3P1 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
500 lb (226.8 kg)	17654	\$1,810.00
1000 lb (453.6 kg)	17655	\$1,810.00
2000 lb (907.2 kg)	17656	\$1,810.00
3000 lb (1360.8 kg)	17657	\$1,810.00
5000 lb (2268.0 kg)	17658	\$1,905.00
10,000 lb (4535.9 kg)	17659	\$1,905.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Fairbanks®	3-39897-X, 3-40766-X
Streeter Richardson	20117XX
Toledo®	10048X00A, KN75066