


HOC Single Point, Aluminum

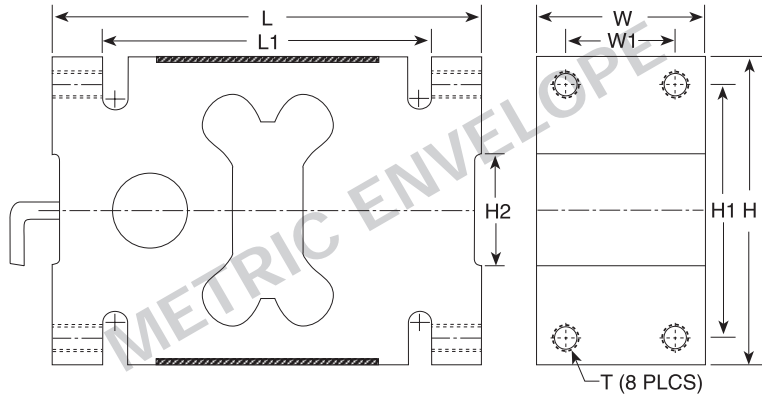

RATED CAPACITY	DIMENSIONS							
	H	H1	H2	L	L1	T	W	W1
kg/millimeters								
750-2000	126.0	95.0	45.0	176.0	135.0	M16X2-6H	76.0	46.0
lb/inches								
1653.8-4409.2	4.96	3.74	1.77	6.93	5.31	M16X2-6H	2.99	1.81

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Seal Type:	Environmentally protected, potted
Bridge Resistance:	350 ohms, nominal	Cable Length:	6m/19.7'
Material/Finish:	Anodized aluminum	Cable Color Code:	Green ... + Excitation Black - Excitation Blue + Sense Brown ... - Sense Red + Signal White - Signal
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Warranty:	1 year
Safe Overload:	150% Full scale		
Rated Excitation:	10V AC/DC (15V maximum)		
Total Error:	0.02% Full scale		
Insulation Resistance:	5000 megohms		

HOC ORDER INFORMATION

Load Rating	Part #	Suggested List Price
750 kg (1653.8 lb)	42117	\$400.00
1000 kg (2205.0 lb)	42118	\$400.00
2000 kg (4410.0 lb)	42119	\$400.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Tedea-Huntleigh	(see page 323) 1320