


MBB Single-Ended Beam, Alloy Steel

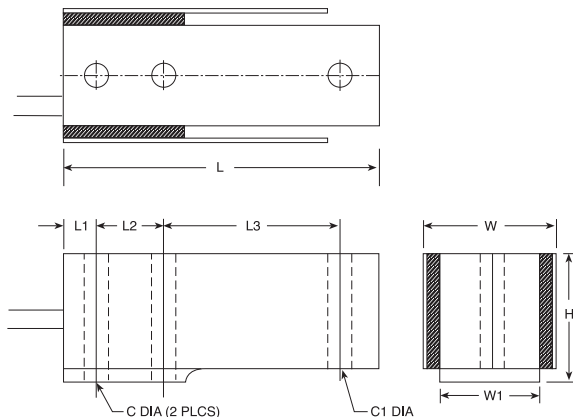

RATED CAPACITY	DIMENSIONS								
	C	C1	W	W1	H	L	L1	L2	L3
lb/inches									
50-150	0.172	0.172	0.70	0.50	1.00	2.38	0.25	0.50	1.31
250	0.172	0.172	1.00	0.75	1.00	2.38	0.25	0.50	1.31
kg/millimeters									
22.7-68.0	4.37	4.37	17.8	12.7	25.4	60.5	6.4	12.7	33.3
113.4	4.37	4.37	25.4	19.1	25.4	60.5	6.4	12.7	33.3

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
 Bridge Resistance: 350 ohms, nominal
 Material/Finish: High-alloy steel, nickel plated
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Safe Overload: 200% Full scale
 Rated Excitation: 10V DC (15V maximum)
 Nonlinearity: 0.03% Full scale
 Hysteresis: 0.02% Full scale

Insulation Resistance: 2000 megohms
 Seal Type: Environmentally protected
 Cable Length: 3'/0.9m
 Cable Color Code: Red + Excitation
 Black - Excitation
 Green ... + Signal
 White - Signal
 Warranty: 1 year

MBB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
50 lb (22.7 kg)	30130	\$195.00
100 lb (45.4 kg)	30131	\$195.00
150 lb (68.0 kg)	30132	\$195.00
250 lb (113.4 kg)	35786	\$195.00

INTERCHANGEABLE PRODUCT INFORMATION

Manufacturer	Model
Sensortronics	(see page 279) 65007
Interface®	MB
Revere	CBU