


STC SS S-Beam, Stainless Steel, IP67

**EXPANDED!
Capacity Range!**

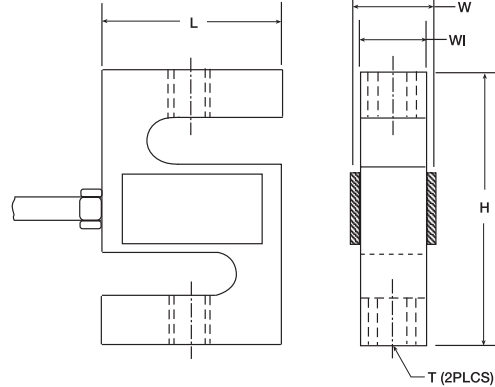

RATED CAPACITY	DIMENSIONS				
	T	L	W	W1	H
lb/inches					
250	3/8-24 UNF	2.00	.75	.50	3.00
500-1500	1/2-20 UNF	2.00	1.00	.75	3.00
2000-3000	1/2-20 UNF	2.00	1.25	1.00	3.00
5000	3/4-16 UNF	3.00	1.25	1.00	4.25
10,000	3/4-16 UNF	3.50	1.25	1.00	4.25
kg/millimeters					
113.4	3/8-24 UNF	50.8	19.1	12.7	76.2
226.8-907.2	1/2-20 UNF	50.8	25.4	19.1	76.2
1134.0-1360.8	1/2-20 UNF	50.8	31.8	25.4	76.2
2268.0	3/4-16 UNF	76.2	31.8	25.4	107.9
4535.9	3/4-16 UNF	88.9	31.8	25.4	107.9

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V nominal
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
Safe Overload: 150% Full scale
Rated Excitation: 10V AC/DC (15V maximum)
Nonlinearity: 0.03% Full scale
Hysteresis: 0.02% Full scale

Insulation Resistance: 2000 megohms
Seal Type: Environmentally protected, IP67
Cable Length: 20'/6.1m
Cable Color Code: Red + Excitation
 Black - Excitation
 Green + Signal
 White - Signal
Warranty: 1 year

STC SS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
250 lb (113.4 kg)	46659	\$295.00
500 lb (226.8 kg)	46661	\$295.00
750 lb (340.2 kg)	46662	\$295.00
1000 lb (453.6 kg)	46663	\$295.00
1500 lb (680.4 kg)	46664	\$295.00
2000 lb (907.2 kg)	46665	\$295.00
2500 lb (1134.0 kg)	46666	\$315.00
3000 lb (1360.8 kg)	46667	\$315.00
5000 lb (2268.0 kg)	46668	\$445.00
10,000 lb (4535.9 kg)	46669	\$455.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Sensortronics	(see page 271) 60050