
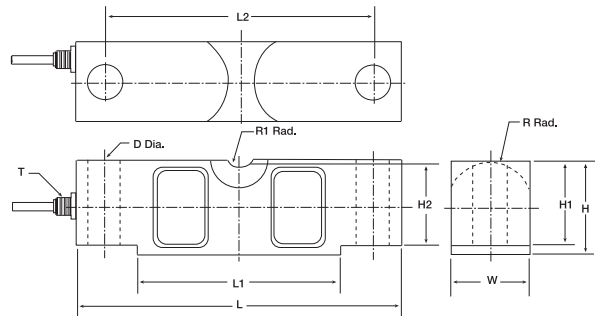


CLB Double-Ended Beam, Alloy Steel

NTEP 1:10,000 Class IIIL Multiple Cell, IP67

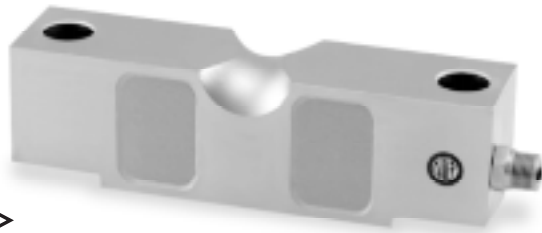

RATED CAPACITY	DIMENSIONS										
	L	L1	L2	W	H	H1	H2	D	R	R1	T
lb/inches											
20,000-25,000	7.75	4.99	6.50	1.69	1.94	1.70	1.63	.68	.90	.75	1/4-18NPT
40,000	10.25	6.39	8.50	1.94	2.44	2.10	2.00	.81	1.12	1.00	1/4-18NPT
50,000-75,000	10.25	6.39	8.50	2.44	2.94	2.65	2.54	1.06	1.37	1.00	1/2-14NPT
100,000-125,000	15.25	8.99	12.75	2.90	3.86	2.43	3.30	1.62	1.80	1.50	1/2-14NPT
kg/millimeters											
9072.0-11,340.0	196.9	126.7	165.1	42.9	49.3	43.2	41.4	17.3	22.9	19.1	1/4-18NPT
18,144.0	260.4	162.3	215.9	49.3	62.0	53.3	50.8	20.6	28.5	25.4	1/4-18NPT
22,680.0-34,020.0	260.4	162.3	215.9	62.0	74.7	67.3	64.5	26.9	34.8	25.4	1/2-14NPT
45,360.0-56,700.0	387.4	228.4	323.9	73.7	98.0	87.1	83.8	41.2	45.7	38.1	1/2-14NPT

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
 Bridge Resistance: 700 ohms, nominal
 Material/Finish: High-alloy steel, nickel plated
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Safe Overload: 150% Full scale
 Rated Excitation: 10V AC/DC (15V maximum)
 Combined Error: 0.025%
 Insulation Resistance: 5000 megohms

Seal Type: Environmentally sealed, IP67
 Cable Length: 25'/7.6m
 Cable Color Code: Red + Excitation
 Black - Excitation
 Green ... + Signal
 White - Signal
 Warranty: 1 year

CLB ORDER INFORMATION			
Load Rating	Part #	Suggested List Price	
20,000 lb (9071.9 kg)	46675	\$610.00	
25,000 lb (11,339.8 kg)	46676	\$625.00	
40,000 lb (18,144.0 kg)	46677	\$745.00	
50,000 lb (22,679.6 kg)	46678	\$810.00	
60,000 lb (27,216.0 kg)	46679	\$810.00	
75,000 lb (34,019.5 kg)	46680	\$810.00	
100,000 lb (45,360.0 kg)	46681	\$1,475.00	
125,000 lb (56,700.0 kg)	46682	\$1,475.00	

INTERCHANGEABLE PRODUCTS	
Manufacturer	Model
Rice Lake Weighing Systems	(see page 137) RL75058
Sensortronics	(see page 286) 65068
Tedea	(see page 311) 4158