




FLINTEC

PC1 Single-Point, Stainless Steel NTEP 1:3000 Class III Single Cell

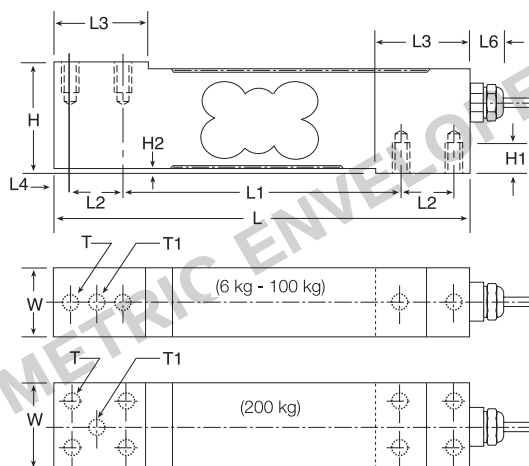

RATED CAPACITY	DIMENSIONS													
	H	H1	H2	L	L1	L2	L3	L4	L5	L6	W	T	T1	
kg/millimeters														
15-100	40.0	10.0	1.5	150.0	100.0	19.0	32.0	6.0	15.5	20.0	25.4	4 X M6/10DP	M6/10DP/Drill Through	
200	40.0	10.0	1.5	150.0	100.0	19.0	32.0	6.0	15.5	20.0	38.1	8 X M6/10DP	M6/10DP/Drill Through	
lb/inches														
33.1-220.5	1.57	.40	.06	5.90	3.93	.75	1.26	.24	.61	.79	1.00	4 X M6/10DP	M6/10DP/Drill Through	
441.0	1.57	.40	.06	5.90	3.93	.75	1.26	.24	.61	.79	1.50	8 X M6/10DP	M6/10DP/Drill Through	

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Safe Overload:	200% Full scale
Rated Excitation:	5V AC/DC (15V maximum)
Combined Error:	0.02% Full scale

Insulation Resistance:	5000 megohms
Seal Type:	Environmentally protected
Cable Length:	1m/3.3'
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Platform Size:	18" x 18"
Warranty:	1 year

PC1 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
6 kg (13.2 lb)	41820	\$300.00
10 kg (22.0 lb)	41821	\$300.00
15 kg (33.1 lb)	36219	\$300.00
30 kg (66.1 lb)	36220	\$300.00
50 kg (110.2 lb)	36221	\$300.00
75 kg (165.4 lb)	36222	\$300.00
100 kg (220.5 lb)	36223	\$300.00
200 kg (441.0 lb)	36224	\$445.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake	(see page 150) RL1140
Tedea	(see page 318) 1140