


PC2 Single-Point, Stainless Steel Hermetically Sealed IP68

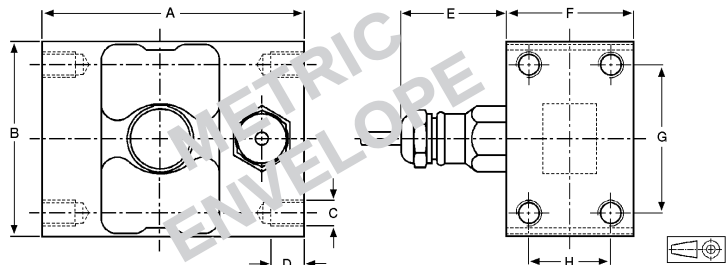

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	H
kg/millimeters								
150	101.6	75.0	M10	13.0	41.0	49.5	57.2	31.8
lb/inches								
330.8	4.00	2.95	M10	.51	1.61	1.95	2.25	1.25

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	1,000 ohms, nominal	Seal Type:	Hermetically sealed, IP68
Material/Finish:	Stainless steel	Cable Length:	3m/10'
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	200% Full scale	Warranty:	1 year
Rated Excitation:	5V AC/DC (15V maximum)		
Combined Error:	0.02% Full scale		

PC2 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
150 kg (330.7 lb)	41176	\$1,010.00