




FLINTEC

PC6 Single-Point, Stainless Steel Hermetically Sealed IP68

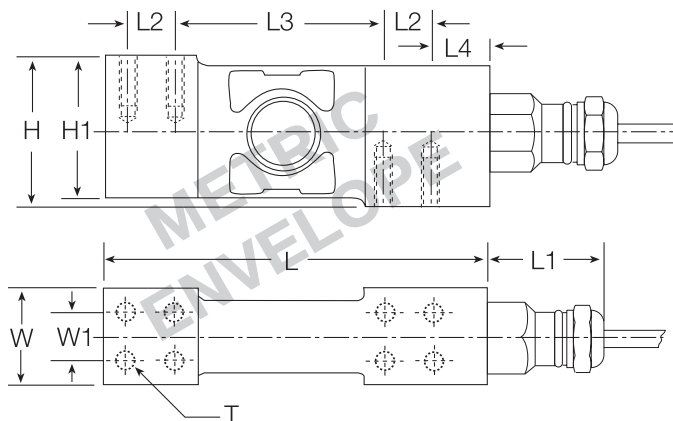

RATED CAPACITY	DIMENSIONS									
	H	H1	L	L1	L2	L3	L4	W	W1	T
kg/millimeters 30-200	48.0	45.5	123.0	41.0	15.2	67.6	17.8	30.1	15.2	8 X M6/15DP
lb/inches 66.1-441.0	1.89	1.80	4.84	1.61	.60	2.66	.70	1.18	.60	8 X M6/15DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	1000 ohms, nominal	Seal Type:	Hermetically sealed, IP68
Material/Finish:	Stainless steel	Cable Length:	1m/3.3'
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	200% Full scale	Platform Size:	24" x 24"
Rated Excitation:	5V AC/DC (15V maximum)	Warranty:	1 year
Combined Error:	0.02% Full scale		

PC6 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
20 kg (44.1 lb)	36225	\$650.00
50 kg (110.2 lb)	36226	\$650.00
100 kg (220.5 lb)	36227	\$650.00
200 kg (441.0 lb)	36228	\$650.00