




SB6 Single-Ended Beam, Stainless Steel

Hermetically Sealed IP68, OIML C3

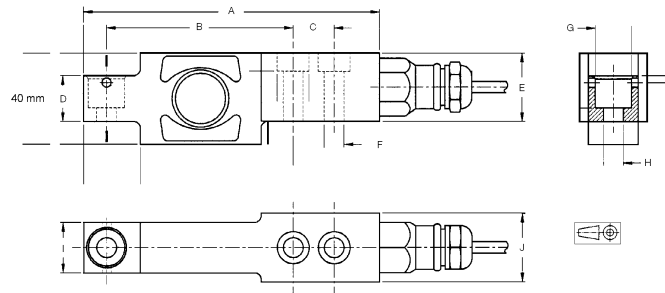

RATED CAPACITY	A	B	C	D	E	F	G	H	I	J
kg/millimeters										
20-200	130.0	82.0	18.0	20.0	30.0	8.7	16.0	8.7	22.0	30.0
lb/inches										
44.1-441.0	5.12	3.23	.71	.79	1.18	.34	.63	.34	.87	1.18

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	1000 ohms, nominal	Seal Type:	Hermetically sealed, IP68
Material/Finish:	Stainless steel	Cable Length:	3m/10'
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	200% Full scale	Warranty:	1 year
Rated Excitation:	5V AC/DC (15V maximum)		
Combined Error:	0.01% Full scale		

SB6 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
20 kg (44.1 lb)	41163	\$410.00
50 kg (110.2 lb)	41164	\$410.00
100 kg (220.5 lb)	41165	\$410.00
200 kg (440.9 lb)	41166	\$410.00