




FLINTEC

SLB Single-Ended Beam, Stainless Steel

NTEP, 1:4000 Class III Single Cell/1:7500 Class III Multiple Cell



APPROVED

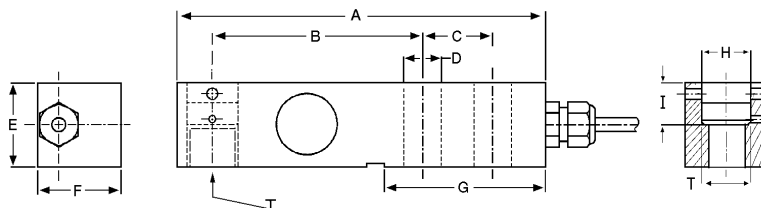

RATED CAPACITY

kg/millimeters
91-2268

A

B

C

D

DIMENSIONS

E

F

G

H

I

T

136.4

76.2

25.4

13.5

30.1

30.0

61.5

13.5

15.0

1/2-20 UNF

lb/inches

200-5000

5.25

3.00

1.00

.53

1.19

1.18

2.30

.53

.59

1/2-20 UNF

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 1000 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Safe Overload: 200% Full scale
Rated Excitation: 10V DC (15V maximum)
Insulation Resistance: 5000 megohms
Combined Error: 0.01% Full scale

Seal Type: Environmentally protected
Cable Length: 3m/10'
Cable Color Code: Green + Excitation
Black - Excitation
White + Signal
Red - Signal
Yellow Shield
Warranty: 1 year

SLB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
200 lb (440.9 kg)	64691	\$295.00
500 lb (226.8 kg)	41172	\$295.00
1000 lb (453.6 kg)	41173	\$295.00
2500 lb (1134 kg)	41174	\$295.00
5000 lb (2268 kg)	41175	\$295.00