




ZLB Single-Point, Aluminum

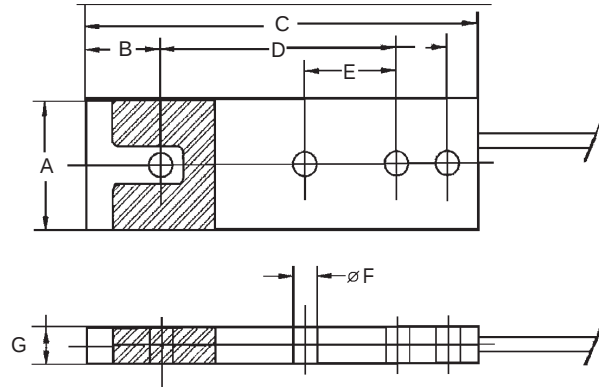

RATED CAPACITY	DIMENSIONS						
	A	B	C	D	E	F	G
kg/millimeters							
20	44.5	26.2	136.8	82.0	18.0	8.2	9.5
50	44.5	26.2	136.8	82.0	18.0	8.2	12.7
100	44.5	26.2	136.8	82.0	18.0	8.2	12.7
200	44.5	26.2	136.8	82.0	18.0	8.2	15.9
500	44.5	26.2	136.8	82.0	18.0	8.2	15.9
lb/inches							
44.1	1.75	1.03	5.39	3.23	0.70	0.32	.37
110.2	1.75	1.03	5.39	3.23	0.70	0.32	.50
220.5	1.75	1.03	5.39	3.23	0.70	0.32	.50
440.9	1.75	1.03	5.39	3.23	0.70	0.32	.63
1102.3	1.75	1.03	5.39	3.23	0.70	0.32	.63

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	1000 ohms, nominal	Seal Type:	Potted, IP67
Material/Finish:	Anodized aluminum	Cable Length:	3m
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	200% Full scale	Warranty:	1 year
Rated Excitation:	5V AC/DC (15V maximum)		
Combined Error:	0.02% Full scale		

ZLB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
20 kg (44.1 lb)	53291	\$140.00
50 kg (110.2 lb)	53290	\$140.00
100 kg (220.5 lb)	53289	\$140.00
200 kg (441.0 lb)	53292	\$140.00