
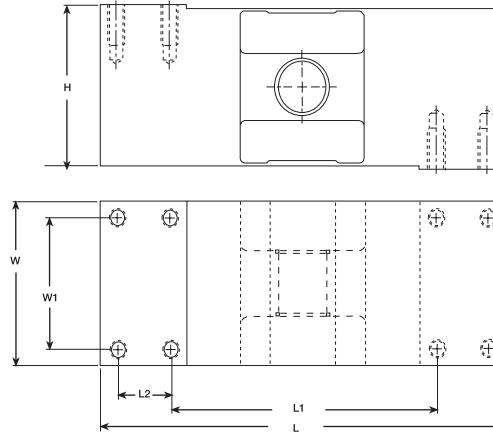


PCB Single-Point, Stainless Steel (IP 68 Rated) Hermetically Sealed

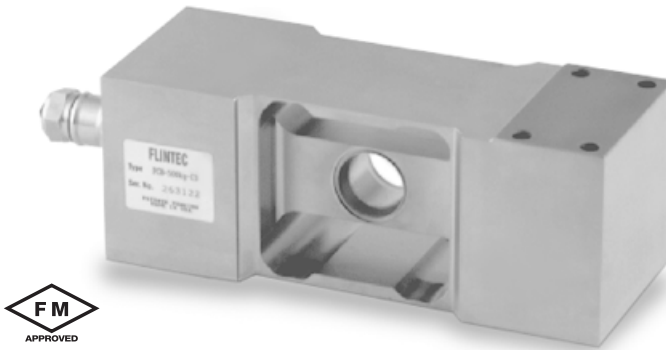

RATED CAPACITY	DIMENSIONS					
	L	L1	L2	W	W1	H
kg/millimeters						
50-1000	190.5	124.8	24.9	74.9	59.9	74.9
lb/inches						
110.3-2205	7.50	4.92	.98	2.95	2.36	2.95

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	1000 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Safe Overload:	200% Full scale
Rated Excitation:	10V AC/DC (20V maximum)
Total Error:	0.02% Full scale
Insulation Resistance:	5000 megohms

Deflection at Capacity:	50-1000 kg ≤ .4mm/.015"
Seal Type:	Hermetically sealed
Cable Length:	10'/3.1m
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Platform Size:	24" x 24"
Warranty:	1 year

PCB ORDER INFORMATION

Load Rating	Part #	Suggested List Price
50 kg (110.3 lb)	45274	\$995.00
100 kg (220.5 lb)	45275	\$995.00
250 kg (551.3 lb)	45276	\$995.00
500 kg (1,102.5 lb)	45277	\$995.00
1000 kg (2,205 lb)	45278	\$995.00
Conduit Adapter	17703 (1/2-14 NPT)	\$18.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 154) RL1250
Revere Transducers	(see page 261) 652
Tedea Huntleigh	(see page 322) 1250
Celtron	(see page 188) LOC