


UB6 S-Beam, Stainless Steel Hermetically Sealed IP68, OIML C3

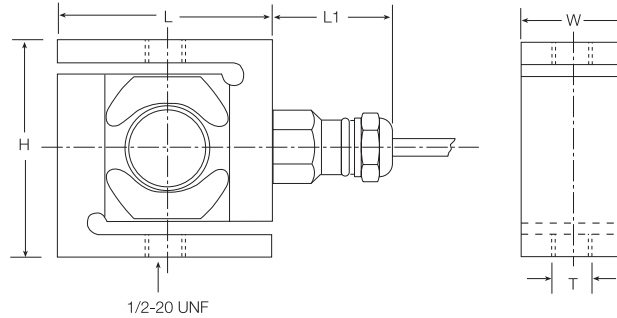

RATED CAPACITY	H	L	DIMENSIONS L1	W	T
lb/inches 225-1125 (1 kN-5 kN*)	2.42	2.42	1.61	1.20	1/2-20 UNF
kg/millimeters 102.1-510.3 (1 kN-5 kN*)	61.5	61.5	41.0	30.0	1/2-20 UNF

* Also available with metric threads

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V **
 Bridge Resistance: 1000 ohms, nominal
 Material/Finish: Stainless steel
 Temperature: Compensated range
 14°F to 104°F/-10°C to 40°C
 Safe Overload: 200% Full scale
 Rated Excitation: 5V AC/DC (15V maximum)
 Combined Error: 0.02% Full scale

Insulation Resistance: 5,000 megohms
 Seal Type: Hermetically sealed, IP68
 Cable Length: 10'/3m
 Cable Color Code:
 Green + Excitation
 Black - Excitation
 White + Signal
 Red - Signal
 Yellow Shield
 Warranty: 1 year

UB6 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
225 lb (1 kN*) (102.1 kg)	36214	\$495.00
450 lb (2kN*) (204.1 kg)	36215	\$495.00
1125 lb (5 kN*) (510.3 kg)	36216	\$495.00

WEIGH MODULE AVAILABLE

Model	Page #
ITCM - Isolated Tension Cell Mount	27-29, or 335
(225 lb, 520 lb, 1125 lb and lb capacities only)	

* kN = Kilonewtons, 1 kN = 224.8089 lb