


H35 Single Ended Beam, Stainless Steel

NTEP 1:5000 Class III Multiple Cell, IP67

**NEW
PRODUCT**

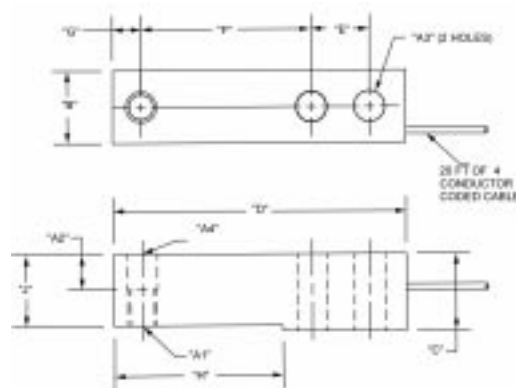

RATED CAPACITY	DIMENSIONS											
	A1	A2	A3	A4	B	C	D	E	F	G	H	I
lb/inches												
1,000-5000	1/2-20 UNF-2B	.62	.53	.53	1.21	1.19	5.12	1.00	3.00	.50	2.85	1.120
kg/millimeters												
453.6-2268	1/2-20 UNF-2B	15.8	13.5	13.5	30.7	30.2	130.05	25.4	76.2	12.7	72.4	28.4

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Seal Type:	Welded seal, IP67
Material/Finish:	Stainless Steel	Cable Length:	20'/6.1m
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green ... + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	100% Full scale	Warranty:	1 year
Rated Excitation:	10V DC (15V maximum)		
Nonlinearity:	0.03% Full scale		
Hysteresis:	0.03% Full scale		

H35 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
1,000 lb (453.6 kg)	64876	\$285.00
2,500 lb (1134.0 kg)	64877	\$285.00
4,000 lb (1814.4 kg)	64878	\$285.00
5,000 lb (2268.0 kg)	64879	\$285.00