




SBF Single-Ended Beam, Alloy Steel

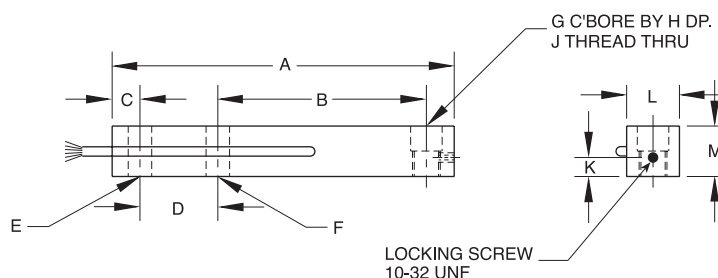

RATED CAPACITY	DIMENSIONS											
	A	B	C	D	E	F	G	H	J	K	L	M
lb/inches												
1500-2500	9.00	6.00	.62	1.75	.59	.53	.69	.50	5/8-18 UNF-2B	.25	1.19	1.12
5000	10.00	6.25	.75	2.00	.84	.78	.94	.50	7/8-14 UNF-2B	.50	1.50	1.50
kg/millimeters												
680.4-1134.0	228.6	152.4	15.8	44.5	15.0	13.5	17.5	12.7	5/8-18 UNF-2B	6.4	30.2	28.5
2268.0	254.0	158.8	19.1	50.8	21.3	19.8	23.9	12.7	7/8-14 UNF-2B	12.7	38.1	38.1

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	1000 ohms, nominal	Seal Type:	Environmentally protected
Material/Finish:	High-alloy steel, nickel plated	Cable Length:	15'4.6m
Temperature:	Compensated range 15°F to 115°F/-9°C to 46°C	Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	150% Full scale	Warranty:	1 year
Rated Excitation:	10V DC (15V maximum)		
Nonlinearity:	0.03% Full scale		
Hysteresis:	0.03% Full scale		

SBF ORDER INFORMATION		
Load Rating	Part #	Suggested List Price
1500 lb (680.4 kg)	21708	\$765.00
2500 lb (1134.0 kg)	17115	\$765.00
5000 lb (2268.0 kg)	21707	\$895.00

INTERCHANGEABLE PRODUCTS	
Manufacturer	Model
Fairbanks®	3-48424-X, 3-48363-1A

Fairbanks is a registered trademark of Fairbanks Scales

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171

Prices & Specifications subject to change without notice