




B35 Single-Ended Beam, Stainless Steel

NTEP 1:5000 Class III Multiple Cell

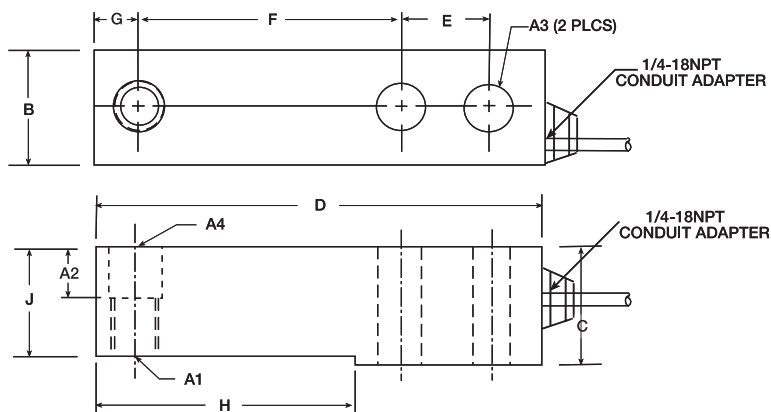

RATED CAPACITY	DIMENSIONS											
	A1	A2	A3	A4	B	C	D	E	F	G	H	J
lb/inches												
500	1/2-20 UNF-2B	.50	.53	.53	1.21	1.00	5.12	1.00	3.00	.50	2.85	.93
1000-4000	1/2-20 UNF-2B	.62	.53	.53	1.21	1.19	5.12	1.00	3.00	.50	2.85	1.12
5000-10,000	3/4-16 UNF-2B	.75	.78	.78	1.44	1.44	6.75	1.50	3.75	.75	3.75	1.34
kg/millimeters												
226.8	1/2-20 UNF-2B	12.7	13.5	13.5	30.7	25.4	130.0	25.4	76.2	12.7	72.4	23.6
453.6-1814.4	1/2-20 UNF-2B	15.7	13.5	13.5	30.7	30.2	130.0	25.4	26.2	12.7	72.4	28.4
2268.0-4535.9	3/4-16 UNF-2B	19.1	19.1	19.8	36.6	36.6	171.5	38.1	95.3	19.1	95.3	34.0

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V nominal
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Safe Overload: 150% Full scale
Rated Excitation: 10V AC/DC (15V maximum)
Combined Error: 0.04%
Insulation Resistance: 5000 megohms

Deflection at Capacity: .010"/.25mm
Seal Type: Environmentally protected
Cable Length: 20'/6.1m
Cable Color Code: Red + Excitation
Black - Excitation
Green + Signal
White - Signal
Yellow Shield
Warranty: 1 year

B35 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
500 lb (226.8 kg)	46486	\$265.00
1000 lb (453.6 kg)	46487	\$265.00
2000 lb (907.2 kg)	46488	\$265.00
2500 lb (1134.0 kg)	46489	\$265.00
3000 lb (1360.8 kg)	46490	\$265.00
4000 lb (1814.4 kg)	46491	\$265.00
5000 lb (2268.0 kg)	46492	\$345.00
10,000 lb (4535.9 kg)	46493	\$345.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 104) RL39123
Revere	(see page 239) 9123

