



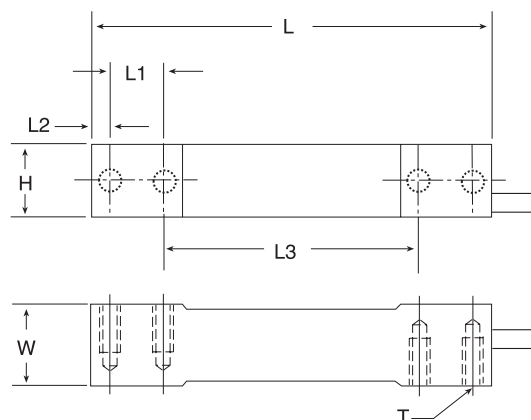

PWS Single Point, Stainless Steel

NTEP 1:3000 Class III Single Cell, OIML C3

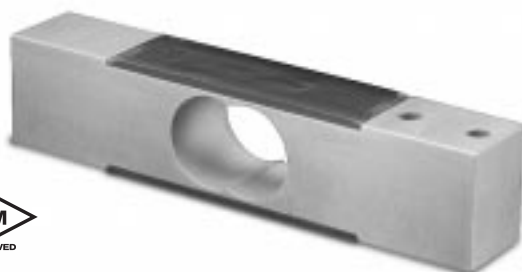

RATED CAPACITY	H	L	L1	L2	L3	T	W
kg/millimeters							
7-15	19.1	139.7	19.1	6.4	88.9	1/4-20	30.2
30-60	23.9	139.7	19.1	6.4	88.9	1/4-20	30.2
lb/inches							
15.4-33.1	.75	5.50	.75	.25	3.50	1/4-20	1.19
66.1-132.3	.94	5.50	.75	.25	3.50	1/4-20	1.19

SPECIFICATIONS

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Safe Overload:	150% Full scale
Rated Excitation:	10V AC/DC (15V maximum)
Combined Error:	0.03% Full scale

Insulation Resistance:	1000 megohms
Seal Type:	Environmentally protected
Cable Length:	3.1m/10'
Cable Color Code:	Green ... + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Warranty:	1 year

PWS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
OIML*		
7 kg (15.4 lb)	40571	\$300.00
10 kg (22.0 lb)	40570	\$300.00
15 kg (33.1 lb)	40569	\$300.00
30 kg (66.1 lb)	40568	\$300.00
60 kg (132.3 lb)	40567	\$300.00

NTEP 1:3000

7 kg (15.4 lb)	36185	\$300.00
10 kg (22.0 lb)	36186	\$300.00
15 kg (33.1 lb)	36187	\$300.00
30 kg (66.1 lb)	36188	\$300.00
60 kg (132.3 lb)	36189	\$300.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 151) RL1380