
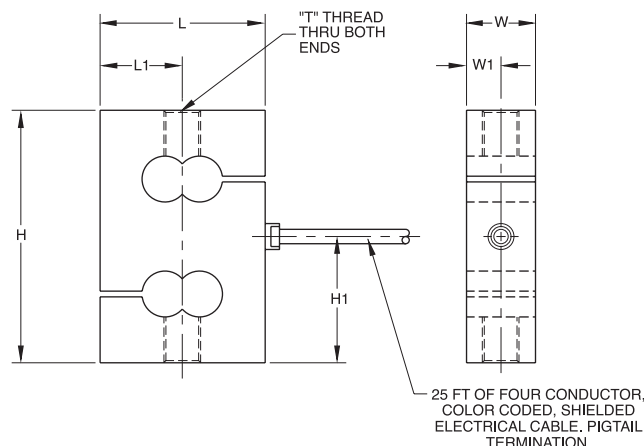


RSC S-Beam, Stainless Steel

NTEP 1:3000 Class III Single Cell

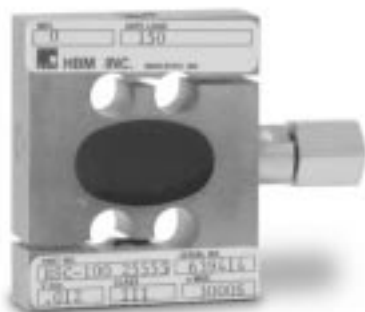

RATED CAPACITY	DIMENSIONS						
	H	H1	L	L1	W	W1	T
lb/inches							
50-300	2.44	1.22	2.00	1.00	.59	.29	3/8-24 UNF-2B
500-3000	3.44	1.72	2.25	1.12	.94	.47	1/2-20 UNF-2B
5000	3.94	1.97	2.75	1.38	1.19	.59	3/4-16 UNF-2B
10,000	3.94	1.97	3.00	1.50	1.44	.72	3/4-16 UNF-2B
kg/millimeters							
22.7-136.1	62.0	31.0	50.8	25.4	15.0	7.4	3/8-24 UNF-2B
226.8-4535.9	87.4	43.7	57.2	28.4	23.9	11.9	1/2-20 UNF-2B
2268.0	100.1	50.0	69.9	35.1	30.2	15.0	3/4-16 UNF-2B
4535.9	100.1	50.0	76.2	38.1	36.6	18.3	3/4-16 UNF-2B

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Seal Type:	Environmentally protected
Material/Finish:	Stainless steel	Cable Length:	25'/7.6m
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green ... + Excitation Black - Excitation White + Signal Red - Signal Yellow Shield
Safe Overload:	150% Full scale	Warranty:	1 year
Rated Excitation:	18V AC/DC		
Nonlinearity:	0.03% Full scale		
Hysteresis:	0.03% Full scale		

RSC ORDER INFORMATION

Load Rating	Part #	Suggested List Price
100 lb (45.4 kg)	21900	\$325.00
200 lb (90.7 kg)	21901	\$325.00
300 lb (136.1 kg)	21902	\$325.00
500 lb (226.8 kg)	21903	\$325.00
750 lb (340.2 kg)	21904	\$325.00
1000 lb (453.6 kg)	21905	\$325.00
2000 lb (907.2 kg)	21906	\$325.00
3000 lb (1360.8 kg)	21907	\$370.00
5000 lb (2268.0 kg)	21908	\$380.00

Non-NTEP cells:

50 lb (22.7 kg)	21899	\$325.00
10,000 lb (4535.9 kg)	21909	\$465.00

NTEP 1:10,000 Class IIIL Single Cell available; consult factory for pricing.

WEIGH MODULE AVAILABLE

Model	Page #
ITCM Isolated Tension Cell Mount	24-29, or 335