


S35 S-Beam, Stainless Steel

NTEP 1:3000 Class III 3S/1:10,000 Class IIIL 10S

**NEW
PRODUCT**

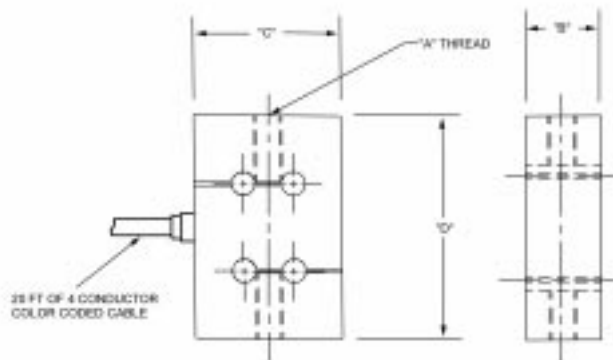

RATED CAPACITY	DIMENSIONS			
	A	B	C	D
lb/inches				
100-200	1/4-28 UNF-2B	.63	2.00	2.50
300	3/8-24 UNF-2B	.63	2.00	3.00
500-3000	1/2-20 UNF-2B	1.00	2.00	3.00
5,000	3/4-16 UNF-2B	1.00	3.00	4.25
10,000	3/4-16 UNF-2B	1.00	3.50	4.75
15,000	1-14 UNF-2B	1.50	4.00	5.50
20,000	1 1/4-12 UNF-2B	2.00	5.00	7.00
lb/inches				
100-200	1/4-28 UNF-2B	16.0	50.8	63.5
300	3/8-24 UNF-2B	16.0	50.8	76.2
500-3000	1/2-20 UNF-2B	25.4	50.8	76.2
5,000	3/4-16 UNF-2B	25.4	76.2	108.0
10,000	3/4-16 UNF-2B	25.4	88.9	120.7
15,000	1-14 UNF-2B	38.1	101.6	139.7
20,000	1 1/4-12 UNF-2B	50.8	127.0	177.8

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V nominal	Deflection at Capacity:	.010"/.25mm
Bridge Resistance:	350 ohms, nominal	Seal Type:	Environmentally protected, IP66
Material/Finish:	Stainless steel	Cable Length:	20'/6.1m
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Red + Excitation Black - Excitation Green + Signal White - Signal Yellow Shield
Safe Overload:		Warranty:	1 year
Rated Excitation:	10V AC/DC (15V maximum)		
Combined Error:	0.03%		
Insulation Resistance:	10,000 megohms		

S35 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
100 lb (45.4 kg)	64859	\$295.00
200 lb (90.7 kg)	64860	\$295.00
300 lb (136.1 kg)	64861	\$295.00
500 lb (226.8 kg)	64862	\$295.00
750 lb (340.2 kg)	64863	\$295.00
1,000 lb (453.6 kg)	64864	\$295.00
2,000 lb (907.2 kg)	64865	\$295.00
2,500 lb (1134.0 kg)	64866	\$295.00
3,000 lb (1360.8 kg)	64867	\$295.00
5,000 lb (2268.0 kg)	64868	\$475.00
10,000 lb (4535.9 kg)	64869	\$550.00
15,000 lb (6803.9 kg)	64870	\$575.00
20,000 lb (9071.8 kg)	64871	\$895.00

USA: 800-472-6703 • Canada/Mexico: 800-321-6703 • International: 715-234-9171