





Z6 Single-Ended Beam, Stainless Steel

Welded Seal, IP67, OIML C3

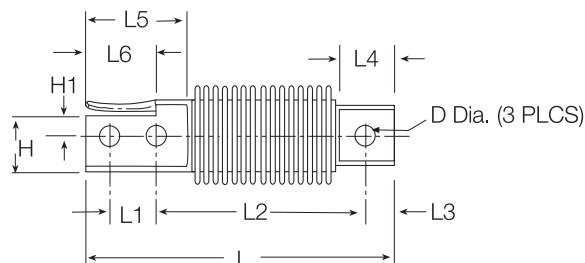

RATED CAPACITY	DIMENSIONS													
	H	H1	L	L1	L2	L3	L4	L5	L6	W	W1	W2	W3	D
kg/millimeters														
5-200	23.1	8.1	120.0	18.0	82.0	9.9	21.3	41.9	27.9	41.9	30.0	20.1	9.9	8.20
lb/inches														
11-441.0	.91	.32	4.72	.71	3.23	.39	.84	1.65	1.10	1.65	1.18	.79	.39	.32

SPECIFICATIONS

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms
Material/Finish: Stainless steel
Temperature: Compensated range
14°F to 158°F/-10°C to 70°C
Safe Overload: 150% Full scale
Rated Excitation: 10V AC/DC (15V maximum)
Combined Error: 0.05% Full scale

Insulation Resistance: 5000 megohms
Seal Type: Welded seal, IP67
Cable Length: 3.1m/10'
Cable Color Code: Green ... + Excitation
Black - Excitation
White + Signal
Red - Signal
Yellow Shield
Warranty: 1 year

Z6 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
5 kg (11 lb)	36172	\$575.00
10 kg (22.0 lb)	36173	\$575.00
20 kg (44.1 lb)	36174	\$575.00
50 kg (110.2 lb)	36175	\$575.00
100 kg (220.5 lb)	36176	\$575.00
200 kg (441.0 lb)	36177	\$575.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 123) RLHBB
Revere Transducers	(see page 244) SHB
Tedea-Huntleigh	(see page 310) 355