


3200 Compression Canister, Low Profile Stainless Steel, Hermetically Sealed, IP66/68

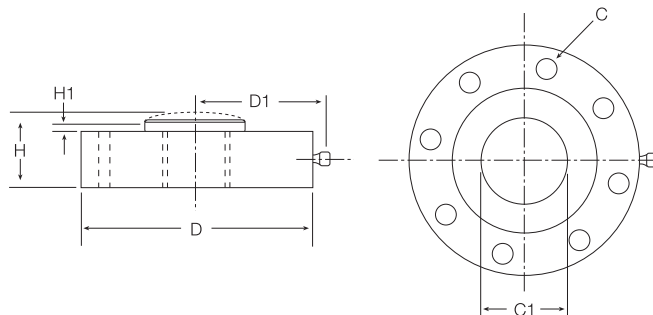

RATED CAPACITY	C	C1	DIMENSIONS D	D1	H	H1
lb/inches						
5000-10,000	.28 Dia. 8 Holes	1.34	4.12	2.56	1.37	.12
25,000-50,000	.34 Dia. 4 Holes	1.57	4.75	2.87	1.75	.12
100,000	.47 Dia. 12 Holes	3.12	7.50	4.25	2.25	.25
kg/millimeters						
2268.0-4535.9	7.1 Dia. 8 Holes	34.0	104.6	65.0	34.8	3.0
11,339.8-22,679.6	8.6 Dia. 4 Holes	39.9	120.7	72.9	44.5	3.0
45,359.2	11.9 Dia. 12 Holes	79.2	190.5	108.0	57.2	6.4

SPECIFICATIONS:

Full Scale Output:	4.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Seal Type:	Hermetically sealed
Material/Finish:	Stainless steel	Cable Length:	20'/6.1m
Temperature:	Compensated range 15°F to 115°F/-9°C to 46°C	Cable Color Code:	Red + Excitation Black - Excitation Green + Signal White - Signal
Safe Overload:	150% Full scale	Warranty:	2 years
Rated Excitation:	10V AC/DC (20V maximum)		
Nonlinearity:	0.05% Full scale		
Hysteresis:	0.04% Full scale		

3200 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
5000 lb (2268.0 kg)	36140	\$925.00
10,000 lb (4535.9 kg)	36141	\$925.00
25,000 lb (11,339.8 kg)	36142	\$1,125.00
50,000 lb (22,679.6 kg)	36143	\$1,125.00
100,000 lb (45,359.2 kg)	36144	\$2,295.00

Load cell bases are available; consult factory.