




652 Potted Single Point, Aluminum NTEP 1:5000 Class III Single Cell, IP65

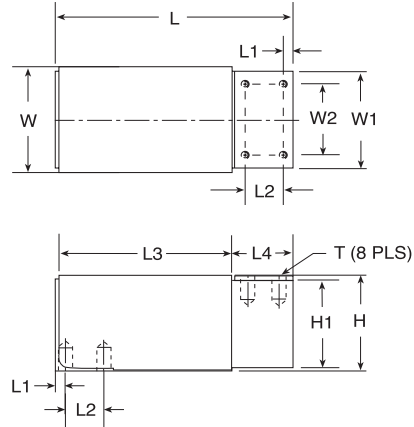

RATED CAPACITY	DIMENSIONS											
	H	H1	L	L1	L2	L3	L4	T	W	W1	W2	
kg/millimeters												
50-1000	75.4	60.2	191.0	8.1	25.0	148.0	39.9	5/16-18 UNC .15.7DP	79.5	76.2	59.9	
lb/inches												
110.2-2204.6	2.97	2.37	7.52	.32	.98	5.84	1.57	5/16-18 UNC .63 DP	3.13	3.00	2.36	

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms	Deflection at Capacity:	50-1000 kg = .048"/1.22mm
Material/Finish:	Aluminum alloy	Seal Type:	Environmentally protected, IP65
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Length:	3.1m/10'
Manufacturer		Cable Color Code:	Red + Excitation Black - Excitation Green + Signal White - Signal Blue + Sense Brown ... - Sense
Model Number:	652-A5-XX-3MP2 (NTEP)	Warranty:	3 years
Safe Overload:	150% Full scale		
Rated Excitation:	10V AC/DC (15V max)		
Total Error:	.02% Full scale		

652 ORDER INFORMATION

Load Rating	Part #	Suggested List Price
NTEP 1:5000 cells:		
50 kg (110.2 lb)	26516	\$360.00
75 kg (165.3 lb)	26517	\$360.00
100 kg (220.5 lb)	26518	\$360.00
150 kg (330.7 lb)	26519	\$360.00
200 kg (440.9 lb)	26520	\$360.00
250 kg (551.2 lb)	26521	\$360.00
300 kg (661.4 lb)	26522	\$360.00
500 kg (1102.3 lb)	26523	\$360.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 154) RL1250
Celltron	(see page 188) LOC
Tedea-Huntleigh	(see page 322) 1250
Flintec	(see page 205) PCB

Revere Transducers, Inc