



HPS Single Point, Stainless Steel Welded Seal, IP67

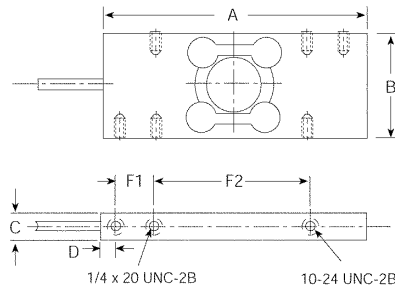

HPS (25-100 LBS)

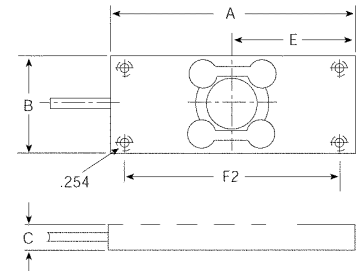

HPS (6 KGS)



RATED CAPACITY	DIMENSIONS						
	A	B	C	D	E	F1	F2
lb/inches							
13.2	5.0	1.98	.73	—	2.5	—	4.25
25	5.0	1.98	.73	.25	—	.75	3.0
50	5.0	1.95	.73	.25	—	.75	3.0
100	5.0	1.82	.94	.25	—	.75	3.0
kg/millimeters							
6.0	127.0	50.2	18.5	—	63.5	—	107.9
11.3	127.0	50.2	18.5	6.3	—	19.0	76.2
22.7	127.0	49.5	18.5	6.3	—	19.0	76.2
45.4	127.0	46.2	23.8	6.3	—	19.0	76.2

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V – HPS
2.0 mV/V – HPSM (metric capacity)

Bridge Resistance: 350 ohms, nominal

Material/Finish: Stainless steel

Temperature: Compensated range
0°F to 150°F/-18°C to 65°C

Manufacturer: Sensortronics

Model Number: HPS-D3-XX-10P5

Safe Overload: 150% Full scale

Rated Excitation: 10V AC/DC (15V maximum)

Combined Error: 0.03% Full scale

Non-repeatability: 0.01% Full scale

Insulation Resistance: 5000 megohms

Seal Type: Welded seal, IP67

Cable Length: 10'/3.1m

Cable Color Code: Green + Excitation
Black - Excitation
White + Signal
Red - Signal

Warranty: 3 years

HPS ORDER INFORMATION

Load Rating	Part #	Suggested List Price
6 kg (13.2 lb)	22335	\$595.00
25 lb (11.3 kg)	17406	\$595.00
50 lb (22.7 kg)	17407	\$595.00
100 lb (45.4 kg)	17408	\$770.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Sensortronics	(see page 299) 60064