


RLC Compression Canister, Stainless Steel

Hermetically Sealed, IP66/68

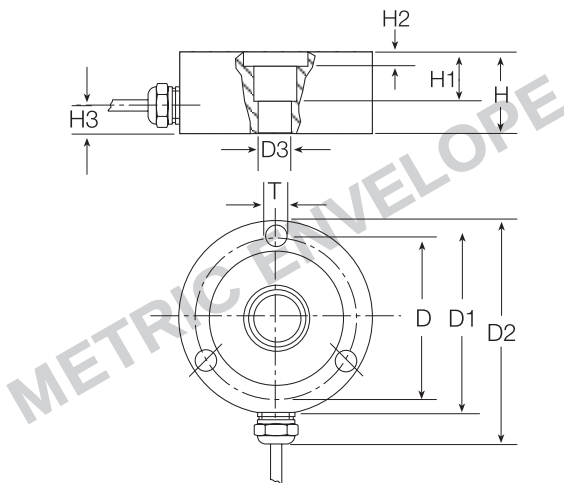

RATED CAPACITY	DIMENSIONS								
	D	D1	D2	D3	H	H1	H2	H3	T
kg/millimeters									
500-1000	70.0	80.0	97.5	10.0	25.0	15.0	1.0	9.5	M6 (3x120°)
2000-5000	70.0	80.0	97.5	15.0	30.0	20.0	6.0	8.5	M6 (3x120°)
lb/inches									
1102.3-2204.6	2.76	3.15	3.84	.40	.99	.60	.04	.37	M6 (3x120°)
4409.2-11,023.1	2.76	3.15	3.84	.60	1.18	.79	.24	.33	M6 (3x120°)

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
 Bridge Resistance: 1000 ohms
 Material/Finish: Stainless steel
 Temperature: Operating range
 -22°F to 158°F/-30°C to 70°C
 Compensated range
 14°F to 104°F/-10°C to 40°C
 Manufacturer
 Model Number: RLC-C3-XX-5MP1
 Safe Overload: 150% Full scale

Rated Excitation: 5V AC/DC (15V maximum)
 Combined Error: 0.02% Full scale
 Insulation Resistance: > 5000 megohms
 Seal Type: Hermetically sealed, IP66/68
 Cable Length: 3m (500-1000kg)
 5m (2000-5000 kg)
 Cable Color Code: Pink + Excitation
 Grey - Excitation
 Brown ... + Signal
 White - Signal
 Warranty: 3 years

RLC ORDER INFORMATION

Load Rating	Part #	Suggested List Price	Cable Length
500 kg (1102.3 lb)	36190	\$525.00	3m cable
1000 kg (2204.6 lb)	36191	\$525.00	3m cable
2000 kg (4409.2 lb)	36192	\$565.00	5m cable
3500 kg (7717.5 lb)	36193	\$565.00	5m cable
5000 kg (11,023.1 lb)	36194	\$565.00	5m cable